
# **MINK MB 0018 A**

Dry claw vacuum pump



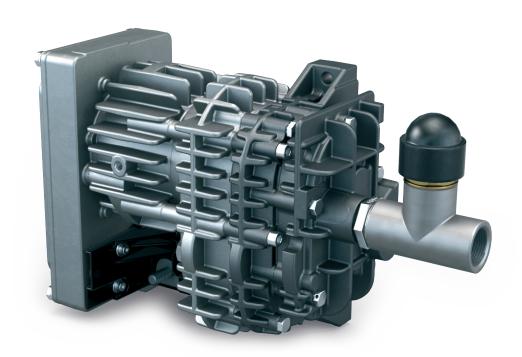

### **Robust**

Specially designed for mobile applications, may be operated under extreme conditions, in temperature ranges between -40 °C and +40 °C and at elevations between -1,000 m and 4,000 m, resistant to severe vibration

### **Efficient**

Latest claw vacuum technology, dry and contact-free compression, no contamination of pumped medium, intelligent variable speed drive, low energy consumption, long life cycle without servicing

## **Compact**

Small footprint due to "all-in-one" design


www.buschvacuum.com © Busch Vacuum Solutions 05.08.2021 1/2

# **MINK MB 0018 A**


Dry claw vacuum pump



#### Dimensional drawing

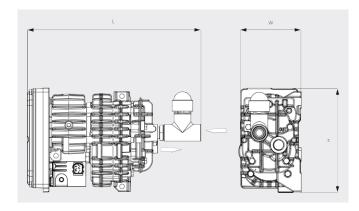

#### Pumping speed Air at 20°C. Tolerance: ± 10%



	MINK MB 0018 A
Nominal pumping speed	18 m³/h
Ultimate pressure	600 / 450 hPa (mbar)
Nominal motor rating	0.5 kW
Nominal motor speed	6000 min <sup>-1</sup>
Ambient temperature	-40 +40
Noise level (ISO 2151)	73 dB(A)
Weight approx.	6.5 kg
Dimensions (L x W x H)	329.5 x 120 x 199 mm
Gas inlet / outlet	G ¾" / G ½"

## **DO YOU WANT TO KNOW MORE?**

Get in touch with us directly! sales@busch.ae or +971 6552 8654





CALL NOW