
MINK MB 0018 A

Dry claw vacuum pump

VACUUM SOLUTIONS

Part of the BUSCH GROUP

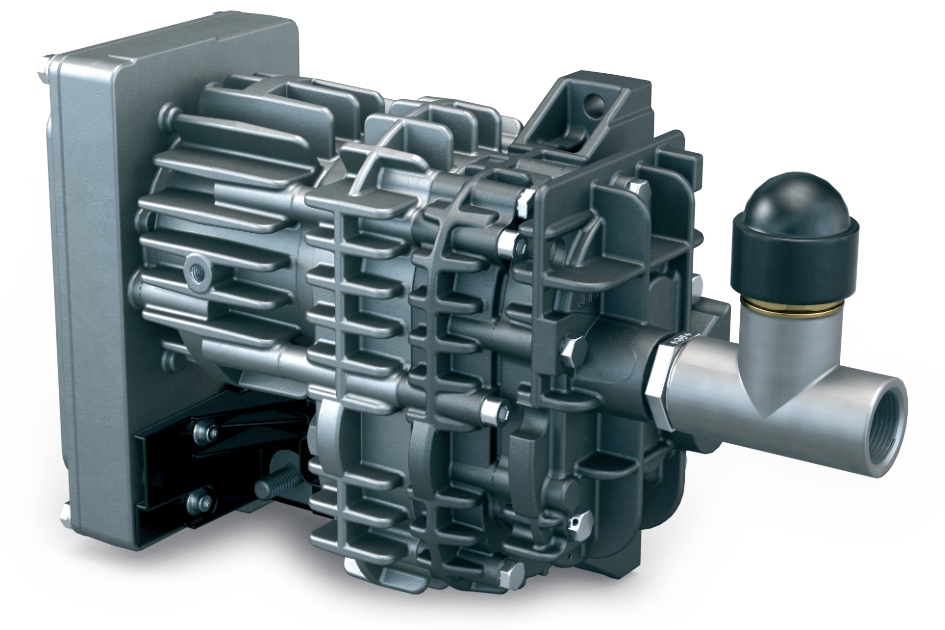

Robust

Specially designed for mobile applications, may be operated under extreme conditions, in temperature ranges between -40 °C and +40 °C and at elevations between -1,000 m and 4,000 m, resistant to severe vibration

Efficient

Latest claw vacuum technology, dry and contact-free compression, no contamination of pumped medium, intelligent variable speed drive, low energy consumption, long life cycle without servicing

Compact

Small footprint due to "all-in-one" design

© Busch Vacuum Solutions


MINK MB 0018 A

Dry claw vacuum pump

VACUUM SOLUTIONS


Part of the BUSCH GROUP

Dimensional drawing

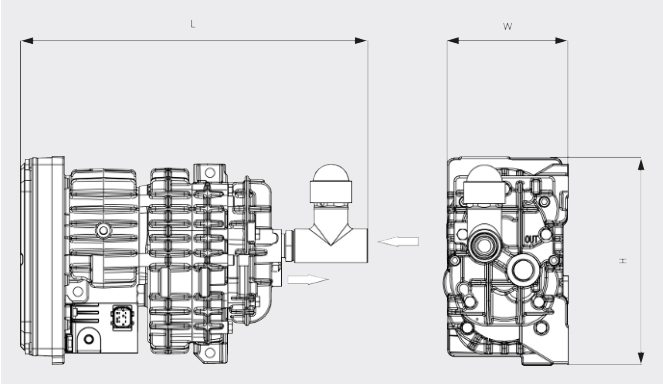

Pumping speed

Air at 20°C. Tolerance: ± 10%

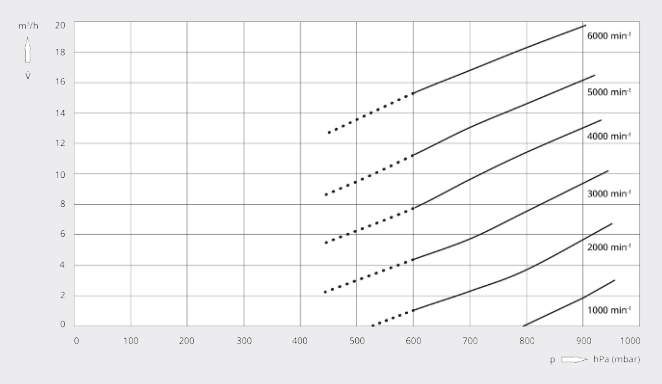

MINK MB 0018 A	
Nominal pumping speed	18 m^3/h
Ultimate pressure	600*/ 450** hPa (mbar)
Nominal motor rating	0.5 kW
Nominal motor speed	6000 min^{-1}
Ambient temperature	-40 ... +40 °C
Sound pressure level (ISO 2151), KpA = 3 dB	73 dB(A)
Weight approx.	6.5 kg
Dimensions (L x W x H)	329.5 x 120 x 199 mm
Gas inlet / outlet	G ¾" / G ½"

Technical data / Specifications may vary depending on configuration, selected accessories, installation, and operating conditions.

*permanent usage / **cycle of 6 minutes operation, 4 minutes stop

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

CONTACT FORM

© Busch Vacuum Solutions