

COBRA DH 2760-6260 A

Dry screw vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Plug&Pump

Ready for immediate use, intuitive 7" color touch screen control panel, remote control via web server possible

High performance

High pumping speed enables fast pump down times, e.g. in load lock applications

Efficient

Completely gas-tight and dry system with less wear parts, longer service intervals and high energy efficiency, 70% less power consumption at ultimate pressure by using VacBoost energy saving module

COBRA DH 2760–6260 A


Dry screw vacuum pumps



VACUUM SOLUTIONS


Part of the **BUSCH GROUP**

Dimensional drawing

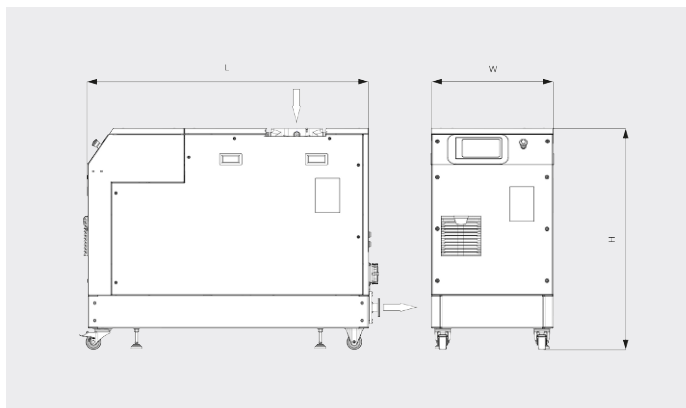

Pumping speed

Air at 20°C. Tolerance: $\pm 10\%$

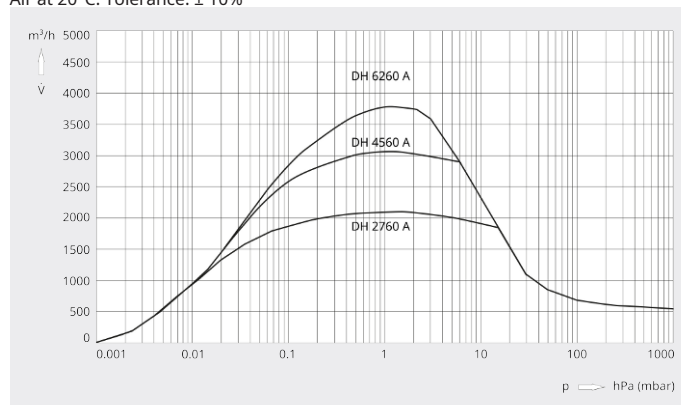

	COBRA DH 2760 A	COBRA DH 4560 A	COBRA DH 6260 A
Nominal pumping speed	2700 m³/h	4500 m³/h	6200 m³/h
Pumping speed at 1 hPa(mbar)	2112 m³/h	3077 m³/h	3781 m³/h
Ultimate pressure	0.001 hPa (mbar)	0.001 hPa (mbar)	0.001 hPa (mbar)
Nominal motor rating	22.5 kW	22.5 kW	22.5 kW
Power consumption at ultimate pressure	9.3 kW	9.5 kW	9.7 kW
Power consumption at ultimate pressure with energy saving module	2.7* kW	2.7* kW	2.7* kW
Leakage rate	$1 \cdot 10^{-6}$ Pa m³/s	$1 \cdot 10^{-6}$ Pa m³/s	$1 \cdot 10^{-6}$ Pa m³/s
Water consumption	10 l/min	10 l/min	10 l/min
Sound pressure level (ISO 2151), KpA = 3 dB	69 dB(A)	69 dB(A)	69 dB(A)
Protection class	IP54	IP54	IP54
Weight approx.	950 kg	950 kg	950 kg

COBRA DH 2760–6260 A

Dry screw vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP

	COBRA DH 2760 A	COBRA DH 4560 A	COBRA DH 6260 A
Dimensions (L x W x H)	1446 x 630 x 1140 mm	1446 x 630 x 1140 mm	1446 x 630 x 1140 mm
Gas inlet / outlet	DN 160 ISO-F DN 150 PN16 / DN 63 ISO-F	DN 160 ISO-F DN 150 PN16 / DN 63 ISO-F	DN 160 ISO-F DN 150 PN16 / DN 63 ISO-F

*Rotational speed in stand-by

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
info@busch.ca or +1 800 363 6360



CONTACT FORM



CALL NOW