

MINK MW 0332 B

Dry claw vacuum pump



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



High performance

Ultimate pressure < 0.8 hPa (mbar), high and constant pumping speed down to 10 hPa (mbar)

Efficient

Low power consumption, reduced carbon footprint, minimized operating costs, easy installation, latest claw vacuum technology, air-cooled

Nearly maintenance-free

Dry and contact-free operation

Accessories, spare parts and options

- Aqua version
- Gastight version
- IoT kit
- Optimized silencer

MINK MW 0332 B


Dry claw vacuum pump



VACUUM SOLUTIONS

Part of the **BUSCH GROUP**


Dimensional drawing

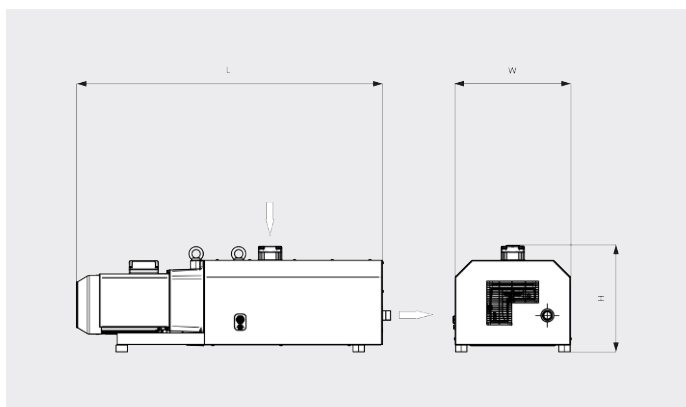

Pumping speed

Air at 20°C. Tolerance: $\pm 10\%$

— 50 Hz 60 Hz

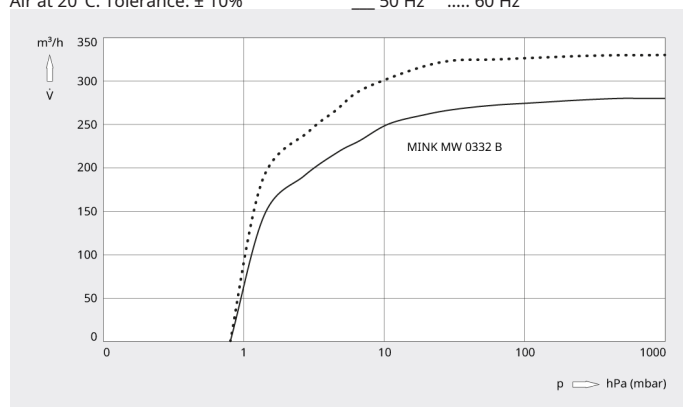

MINK MW 0332 B	
Nominal pumping speed	280 / 330 m³/h (50/60 Hz)
Ultimate pressure	0.8 hPa (mbar)
Power consumption at ultimate pressure	3.7 / 4.7 kW (50/60 Hz)
Nominal motor rating	7.5 / 9.5 kW (50/60 Hz)
Nominal motor speed	3000 / 3600 min ⁻¹ (50/60 Hz)
Permitted motor speed range	1200-3600 min ⁻¹
Sound pressure level (ISO 2151) at ultimate pressure	70 / 73 dB(A) (50/60 Hz) *
Ambient temperature range	0-40 °C
Inlet gas temperature range	0-40 °C
Ambient pressure	Atmospheric pressure
Oil capacity	1.2 l
Weight approx.	325 kg

MINK MW 0332 B

Dry claw vacuum pump



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP

MINK MW 0332 B	
Dimensions (L x W x H)	1365 x 513 x 458 mm
Gas inlet / outlet	G 2" / R 1¼"

*with optional available optimized silencer above 400 hPa (mbar): -5 dB(A), uniped

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
info@busch.ca or +1 800 363 6360



CONTACT FORM



CALL NOW