

COBRA DS 5161/9161 B

Dry screw vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



High performance

Advanced screw design, excellent running qualities, integrated vacuum booster, perfectly suited for chemical vapor deposition, rapid thermal processing or atomic layer deposition

Efficient

Low cost of ownership, minimal maintenance, long service intervals, high uptime, efficient indirect water cooling, high hydrogen throughput

Compact

Fit-in-place design, directly mounted canned motor

COBRA DS 5161/9161 B


Dry screw vacuum pumps



VACUUM SOLUTIONS


Part of the **BUSCH GROUP**

Dimensional drawing

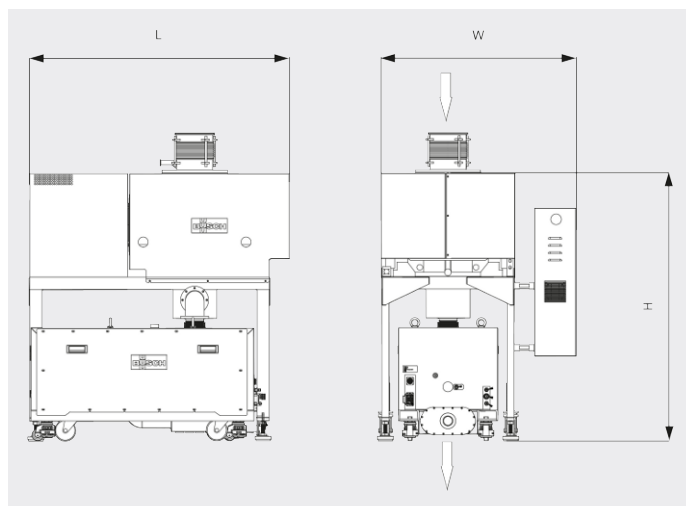

Pumping speed

Air at 20°C. Tolerance: $\pm 10\%$

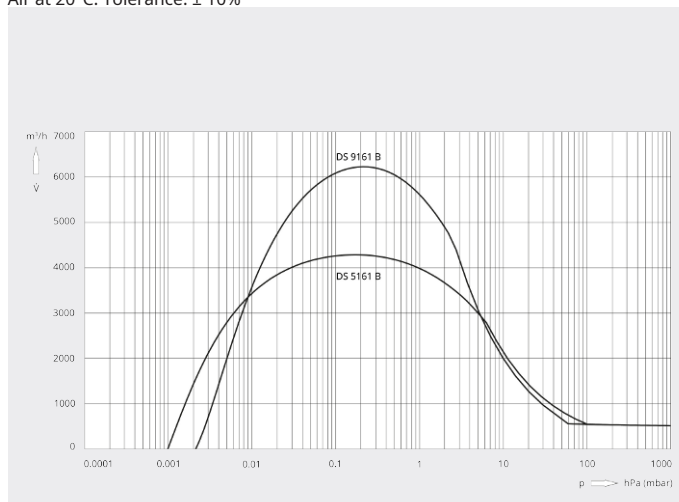

	COBRA DS 5161 B	COBRA DS 9161 B
Nominal pumping speed	4300 m³/h	6220 m³/h
Ultimate pressure	0.001 hPa (mbar)	0.001 hPa (mbar)
Nominal motor rating backing pump	15 kW	15 kW
Nominal motor rating vacuum booster	15 kW	20 kW
Power consumption at ultimate pressure / idle mode	11.5 / 9 kW	13 / 11 kW
Nominal motor speed backing pump	3600 min ⁻¹	3600 min ⁻¹
Nominal motor speed vacuum booster	3000 min ⁻¹	3000 min ⁻¹
Sound pressure level (ISO 2151), KpA = 3 dB	< 75 dB(A)	< 75 dB(A)
Water consumption	min. 15 l/min	min. 14 l/min
Nitrogen consumption	0 – 200 l/min	0 – 200 l/min
Weight approx.	1500 kg	1875 kg

COBRA DS 5161/9161 B

Dry screw vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP

	COBRA DS 5161 B	COBRA DS 9161 B
Dimensions (L x W x H)	1550 x 722 x 1452 mm	1567 x 810 x 1615 mm
Gas inlet / outlet	DN 200 / DN 63	DN 200 / DN 63

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
info@busch.ca or +1 800 363 6360



CONTACT FORM



CALL NOW