

# COBRA NC 0600 C

Dry screw vacuum pump



**VACUUM SOLUTIONS**

Part of the **BUSCH** GROUP



## High performance

Advanced screw design, patented self-balancing screws

## ATEX-certified

Keeps gas temperatures below 200°C, certified for temperature class T3, ideally suited for processes with temperature-sensitive process gases

## Efficient

Low cost of ownership, minimal maintenance, long service intervals, high uptime, efficient water cooling

# COBRA NC 0600 C


Dry screw vacuum pump



**VACUUM SOLUTIONS**

Part of the **BUSCH** GROUP

Dimensional drawing

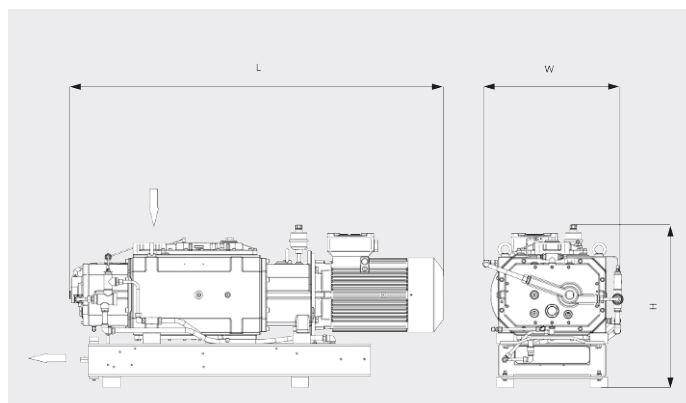

Pumping speed

Air at 20°C. Tolerance:  $\pm 10\%$



| COBRA NC 0600 C                             |                                            |
|---------------------------------------------|--------------------------------------------|
| Pumping speed                               | 600 m³/h                                   |
| Ultimate pressure                           | $\leq 0.01$ hPa (mbar)                     |
| Nominal motor rating                        | 18.5 kW                                    |
| Power consumption at ultimate pressure      | 9 kW                                       |
| Nominal motor speed                         | 3000 / 3600 min <sup>-1</sup> (50 / 60 Hz) |
| Sound pressure level (ISO 2151), KpA = 3 dB | $\leq 74$ / $\leq 76$ dB(A) (50 / 60 Hz)   |
| Weight approx.                              | 600 kg                                     |
| Dimensions (L x W x H)                      | 1502 x 602 x 640 mm                        |
| Gas inlet / outlet                          | DN 100 ISO-K / DN 100 ISO-K                |

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!  
[info@busch.ca](mailto:info@busch.ca) or +1 800 363 6360



CONTACT FORM



CALL NOW