

DOLPHIN LT 0130-0220 A

Liquid ring vacuum pumps



VACUUM SOLUTIONS



Robust

Proven technology, durable two-stage construction, corrosion-free stainless steel impeller, direct flange-mounted motor, no base frame required, integrated flow channel

Reliable

Extremely high vapor and particle tolerance, optimized gas flow

Flexible

Choice of cast iron (EN-GJL-200) or 316 grade stainless steel material housings, ATEX-certified version available (Cat 1G (i) 2G (o) IIC T4), operating fluids other than water possible

Accessories

- Modular pumpsets, configured for once-through, partial or total recirculation of the operating fluid
- Liquid separator
- Cavitation protection
- Heat exchanger
- Gas ejector
- Wide selection of motors
- Non-return valves
- Vacuum relief valves
- Variable speed drive (only for LT 0170/0220 A)


DOLPHIN LT 0130-0220 A

Liquid ring vacuum pumps




VACUUM SOLUTIONS

Dimensional drawing

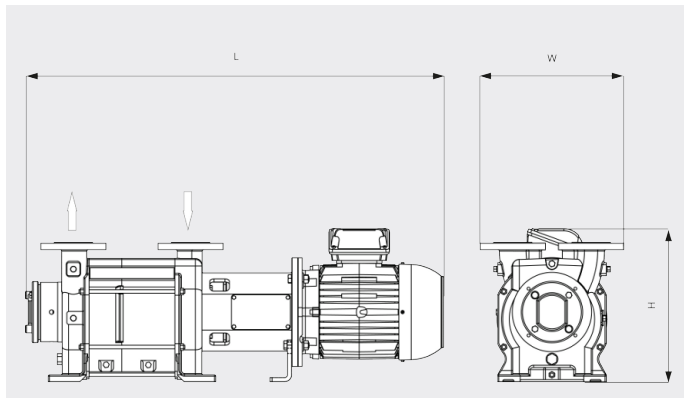

Pumping speed

Dry air at 20 °C. Operating fluid water 15°C. Tolerance: - 10%, in accordance with HEI and Pneurop 6612

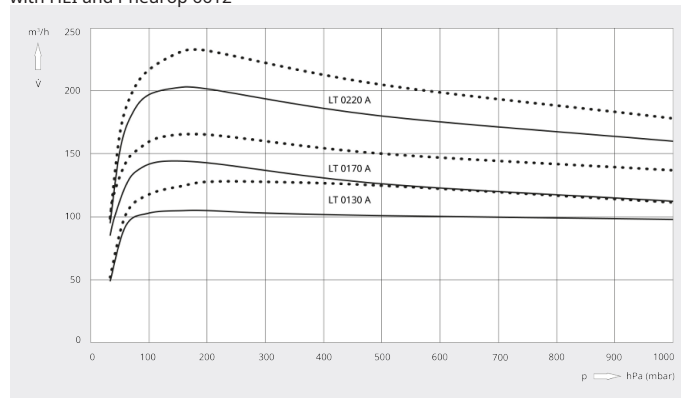

| | DOLPHIN LT 0130 A | DOLPHIN LT 0170 A | DOLPHIN LT 0220 A |
|------------------------|--|--|--|
| Nominal pumping speed | 105 / 128 m ³ /h (50 / 60 Hz) | 144 / 165 m ³ /h (50 / 60 Hz) | 203 / 232 m ³ /h (50 / 60 Hz) |
| Ultimate pressure | 33 hPa (mbar) (50 / 60 Hz) | 33 hPa (mbar) (50 / 60 Hz) | 33 hPa (mbar) (50 / 60 Hz) |
| Max. overpressure | 1.5 bar(g) (50 / 60 Hz) | 1.5 bar(g) (50 / 60 Hz) | 1.2 bar(g) (50 / 60 Hz) |
| Nominal motor rating | 3.0 / 4.0 kW (50 / 60 Hz) | 4.0 / 5.5 kW (50 / 60 Hz) | 5.5 / 7.5 kW (50 / 60 Hz) |
| Nominal motor speed | 1450 / 1750 min ⁻¹ (50 / 60 Hz) | 1450 / 1750 min ⁻¹ (50 / 60 Hz) | 1450 / 1750 min ⁻¹ (50 / 60 Hz) |
| Noise level (ISO 2151) | 70 / 71 dB(A) (50 / 60 Hz) | 70 / 71 dB(A) (50 / 60 Hz) | 70 / 71 dB(A) (50 / 60 Hz) |
| Weight approx. | 139 kg | 149 kg | 188 kg |
| Dimensions (L x W x H) | 906 x 330 x 329 mm | 954 x 330 x 351 mm | 1083 x 330 x 380 mm |
| Gas inlet / outlet | DN 40 PN 10 / DN 40 PN 10 | DN 40 PN 10 / DN 40 PN 10 | DN 40 PN 10 / DN 40 PN 10 |

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
info@busch.ca or +1 800 363 6360



CONTACT FORM



CALL NOW