

# GABA AWE 050 AE

Gas abatement system



VACUUM SOLUTIONS



## Reliable

Specially designed for demanding EPI processes, powerful venturi unit, patented gas inlet clogging preventer, no trapping of by-products before abatement necessary (honey trap)

## Minimal maintenance

Extended service intervals, high uptime, easy servicing, fast service routine, no dismantling necessary

## Efficient

Proven wet scrubber technology, low operating costs, built-in water recirculation system, easy operation through PLC with color touch screen


# GABA AWE 050 AE

Gas abatement system



VACUUM SOLUTIONS

Dimensional drawing

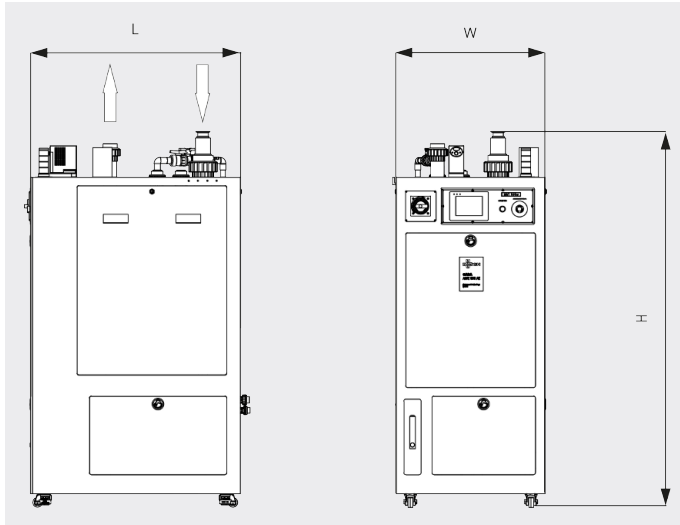

GABA AWE 050 AE	
Capacity	500 slm
Power consumption (avg.)	2 kW
Nitrogen consumption (avg)	100 slm
Water consumption (avg.)	5 slm
Min. gas exhaust	0,5 m <sup>3</sup> /min
Cabinet exhaust	1 m <sup>3</sup> /min
Weight approx. (dry)	230 kg
Weight approx. (wet)	300 kg
Dimensions (L x W x H)	1100 x 780 x 1730 mm
Dimensions (L x W x H) with 3-way valve option	1100 x 780 x 2170 mm

# GABA AWE 050 AE

Gas abatement system



VACUUM SOLUTIONS

GABA AWE 050 AE	
Min. clearance	1100 mm (front), 500 mm (side), 500 mm (rear), 500 mm (top)
Gas inlet	NW 50 flange (1 port)
Gas outlet	50A(2") PVC Union
DRE (Destruction Removal Efficiency)	> 99.99 %
Gas	Hydrogen Chloride (HCl)
Gas flow rate (HCl)	30 slm
Carrier gas flow rate (N <sub>2</sub> )	100 slm
Outlet gas concentration	< 0.13 ppm

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!  
[info@busch.ca](mailto:info@busch.ca) or +1 800 363 6360



CONTACT FORM



CALL NOW