

MINK MV 0310 B

Dry claw vacuum pump



VACUUM SOLUTIONS



Flexible

Variable speed drive (VSD)

Efficient

Latest claw technology, additional pumping speed thanks to pressure control, up to 20% more performance, low energy consumption, minimized operating costs, nearly maintenance-free

Quiet

Low noise level due to a state-of-the-art acoustic design, can be installed at workstations


MINK MV 0310 B

Dry claw vacuum pump



VACUUM SOLUTIONS


Dimensional drawing

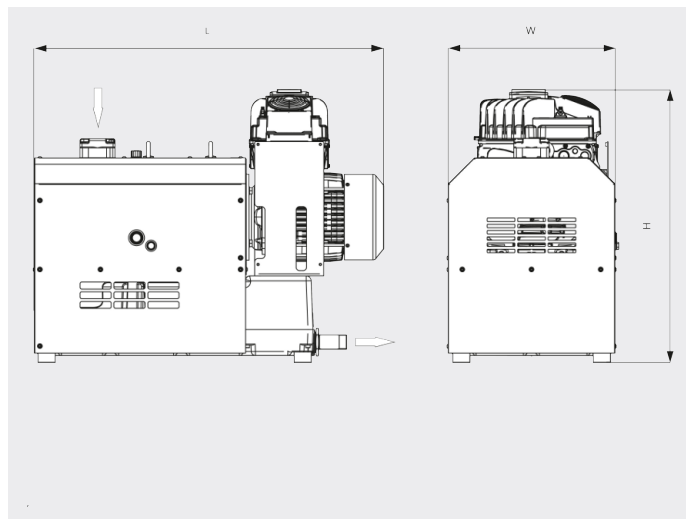

Pumping speed

Air at 20°C. Tolerance: $\pm 10\%$

— 20 Hz 60 Hz

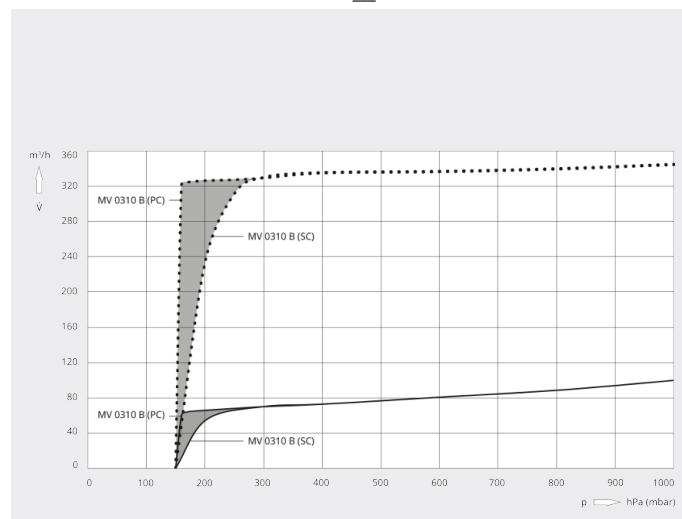

MINK MV 0310 B	
Nominal pumping speed	345 m³/h (20 / 60 Hz)
Ultimate pressure	150 hPa (mbar) (20 / 60 Hz)
Nominal motor rating	6.0 – 8.0 kW (20 / 60 Hz)
Nominal motor speed	1200 – 3600 min ⁻¹ (20 / 60 Hz)
Noise level (ISO 2151)	72 dB(A)
Weight approx.	340 kg
Dimensions (L x W x H)	1015 x 500 x 790 mm
Gas inlet / outlet	G 2" / R 1¼"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
info@busch.ca or +1 800 363 6360



CONTACT FORM



CALL NOW