

MINK MV 0502/0602 B

Dry claw vacuum pumps



VACUUM SOLUTIONS



Quiet

Low noise level due to a state-of-the-art acoustic design, can be installed at workstations

Efficient

Latest claw vacuum technology, low energy consumption, minimized operating costs, nearly maintenance-free, effective air cooling

Compact

Small footprint


MINK MV 0502/0602 B

Dry claw vacuum pumps



VACUUM SOLUTIONS


Dimensional drawing

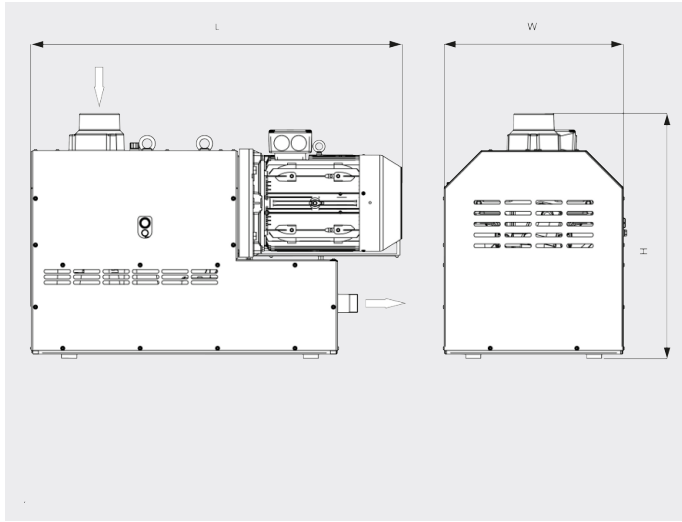

Pumping speed

Air at 20°C. Tolerance: ± 10%

— 50 Hz 60 Hz

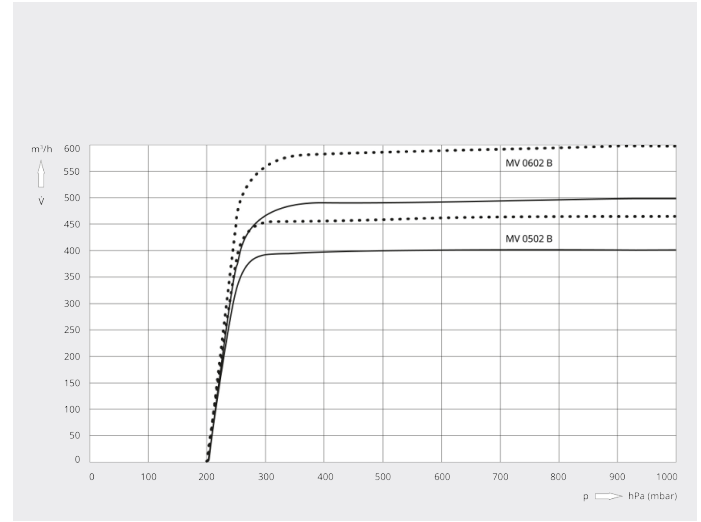

	MINK MV 0502 B	MINK MV 0602 B
Nominal pumping speed	400 / 470 m³/h (50 / 60 Hz)	500 / 600 m³/h (50 / 60 Hz)
Ultimate pressure	200 hPa (mbar) (50 / 60 Hz)	200 hPa (mbar) (50 / 60 Hz)
Nominal motor rating	7.5 kW (50 Hz) 7.5 / 9.5 kW (50 / 60 Hz)	9.2 kW (50 Hz) 11.0 / 12.6 kW (50 / 60 Hz)
Nominal motor speed	3000 / 3600 min ⁻¹ (50 / 60 Hz)	3000 / 3600 min ⁻¹ (50 / 60 Hz)
Noise level (ISO 2151)	72 / 75 dB(A) (50 / 60 Hz)	73 / 76 dB(A) (50 / 60 Hz)
Weight approx.	450 / 470 kg (50 / 60 Hz)	468 / 472 kg (50 / 60 Hz)
Dimensions (L x W x H)	1085 x 580 x 795 mm	1100 x 580 x 795 mm
Gas inlet / outlet	G 3" / R 2"	G 3" / R 2"

MINK MV 0502/0602 B

Dry claw vacuum pumps



VACUUM SOLUTIONS

	MINK MV 0502 B	MINK MV 0602 B
Nominal pumping speed	277 ACFM	353 ACFM
Ultimate pressure	150 TORR	150 TORR
Nominal motor rating	12.7 HP	16.9 HP
Nominal motor speed	3600 RPM	3600 RPM
Noise level (ISO 2151)	75 dB(A)	76 dB(A)
Weight approx.	1036 Lbs.	1040 Lbs.
Dimensions (L x W x H)	42.8 x 22.8 x 31.3 inches	43.3 x 22.8 x 31.3 inches
Gas inlet / outlet	G 3" / R 2"	G 3" / R 2"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
info@busch.ca or +1 800 363 6360



CONTACT FORM



CALL NOW