

COBRA NC 0500 B

Dry screw vacuum pump



VACUUM SOLUTIONS



High performance

Advanced screw design, patented self-balancing screws, specially designed for vacuum packaging

Efficient

Low cost of ownership, minimal maintenance, long service intervals, high uptime, efficient water cooling

Easy cleaning

Smooth surface design, can be cleaned using steam jets and conventional detergents


COBRA NC 0500 B

Dry screw vacuum pump




VACUUM SOLUTIONS

Dimensional drawing

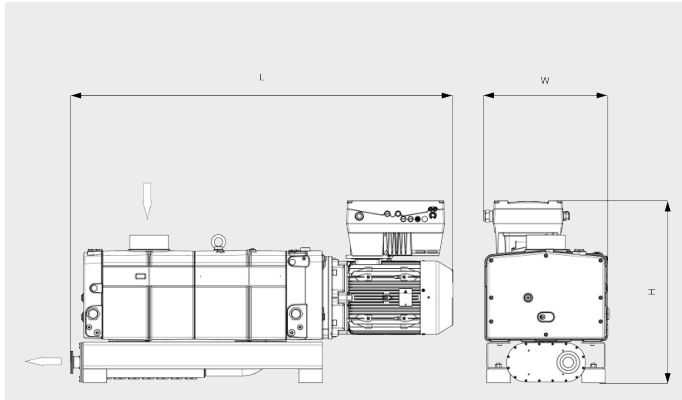

Pumping speed

Air at 20°C. Tolerance: ± 10%

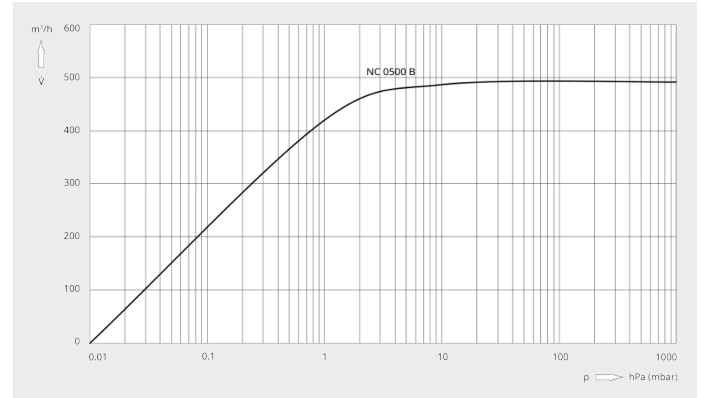

COBRA NC 0500 B	
Nominal pumping speed	490 m³/h
Ultimate pressure	0.01 hPa (mbar)
Nominal motor rating	9.0 kW
Nominal motor speed	2930 min ⁻¹
Operating voltage	190–210 / 380–420 V
Noise level (ISO 2151)	69 dB(A)
Weight approx.	460 kg
Dimensions (L x W x H)	1163 x 485 x 557 mm
Gas inlet / outlet	G2" / G1½"

COBRA NC 0500 B

Dry screw vacuum pump



VACUUM SOLUTIONS

COBRA NC 0500 B	
Nominal pumping speed	288.4 ACFM
Ultimate pressure	0.0075 TORR
Nominal motor rating	12.1 HP
Nominal motor speed	2930 RPM
Operating voltage	190–210 / 380–420 V
Noise level (ISO 2151)	69 dB(A)
Weight approx.	1012 Lbs.
Dimensions (L x W x H)	45.8 x 19.1 x 21.9 inches
Gas inlet / outlet	G2" / G1½"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
info@busch.ca or +1 800 363 6360



CONTACT FORM



CALL NOW