

COBRA NX 0950 A

Dry screw vacuum pump



VACUUM SOLUTIONS



High performance

Advanced screw design, patented self-balancing screws, excellent running qualities, perfectly suited for vacuum drying, freeze drying, degassing, heat treatment, thermoforming and many more

Efficient

Intelligent variable speed drive, low cost of ownership, minimal maintenance, long service intervals, high uptime, efficient water cooling

Robust


High vapor and particle tolerance, self-draining

COBRA NX 0950 A

Dry screw vacuum pump




Dimensional drawing

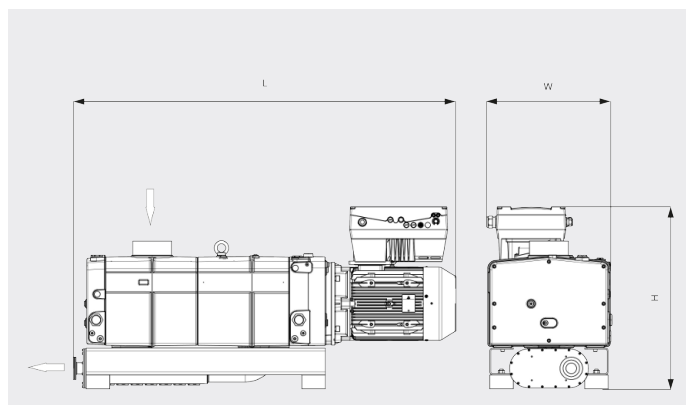

Pumping speed

Air at 20°C. Tolerance: $\pm 10\%$

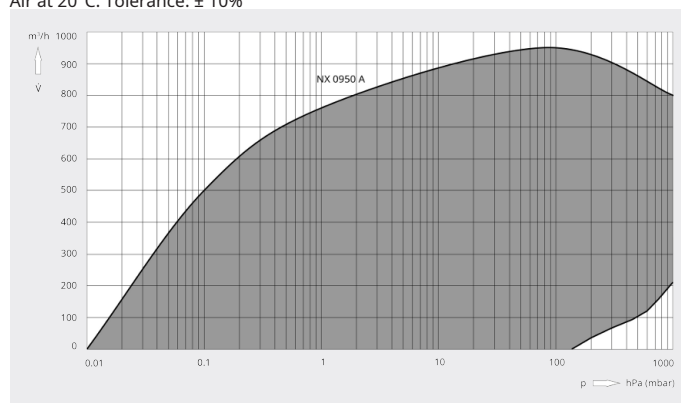

COBRA NX 0950 A	
Nominal pumping speed	max. 950 m³/h
Ultimate pressure	0.01 hPa (mbar)
Nominal motor rating	18.5 kW
Nominal motor speed	4320 min ⁻¹
Noise level (ISO 2151)	75 dB(A)
Weight approx.	1000 kg
Dimensions (L x W x H)	1672 x 526 x 776 mm
Gas inlet / outlet	G3" + ISO-K DN100 / ISO-K DN100

COBRA NX 0950 A

Dry screw vacuum pump



VACUUM SOLUTIONS

COBRA NX 0950 A	
Nominal pumping speed	559.1 ACFM
Ultimate pressure	0.0075 TORR
Nominal motor rating	25 HP
Nominal motor speed	4320 RPM
Noise level (ISO 2151)	75 dB(A)
Weight approx.	2200 Lbs.
Dimensions (L x W x H)	65.8 x 20.7 x 30.6 inches
Gas inlet / outlet	G3" + ISO-K DN100 / ISO-K DN100

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
info@busch.ca or +1 800 363 6360



CONTACT FORM



CALL NOW