

PLASTEX PMM/PMI 0060-0140 A

Vacuum systems



VACUUM SOLUTIONS



Efficient

Improvement of product quality, efficient degassing, low residual contents of volatile components, low energy consumption, minimized operating costs, minimal maintenance

Reliable

Robust construction, reliable operation, contact-free operating principle of claw technology

Flexible

Application-oriented, modular design, easy installation and operation


PLASTEX PMM/PMI 0060-0140 A

Vacuum systems




VACUUM SOLUTIONS

Dimensional drawing

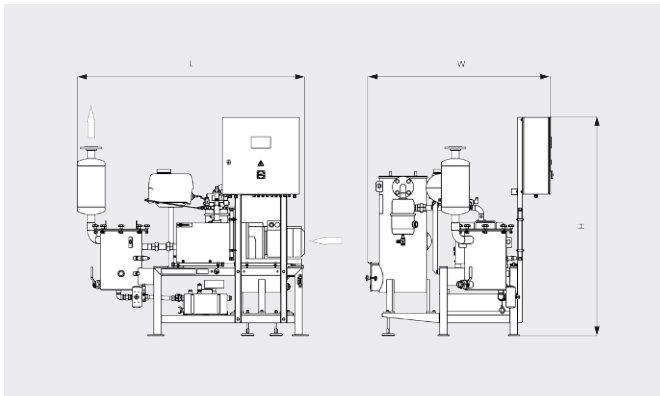

Pumping speed

Air at 20°C. Tolerance: $\pm 10\%$

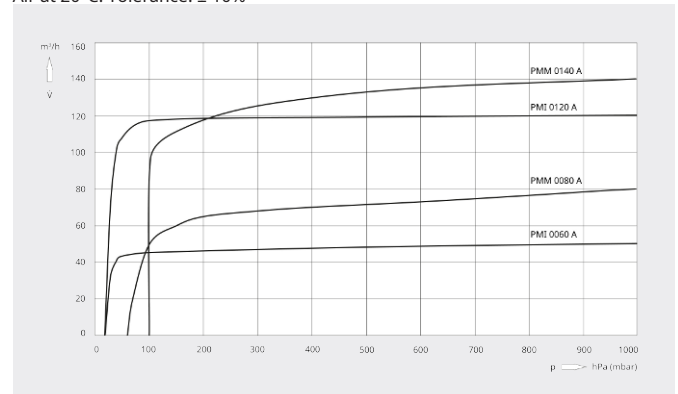

	PLASTEX PMM 0080 A	PLASTEX PMM 0140 A	PLASTEX PMI 0060 A	PLASTEX PMI 0120 A
Nominal pumping speed	80 m³/h	140 m³/h	50 m³/h	120 m³/h
Ultimate pressure	60 hPa (mbar)	100 hPa (mbar)	20 hPa (mbar)	20 hPa (mbar)
Nominal motor rating	2.2 kW	3.5 kW	1.5 kW	4.2 kW
Nominal motor speed	1500 min ⁻¹	3000 min ⁻¹	1500 min ⁻¹	3000 min ⁻¹
Noise level (ISO 2151)	76 dB(A)	80 dB(A)	75 dB(A)	81 dB(A)
Weight approx.	506 kg	514 kg	552 kg	572 kg
Dimensions (L x W x H) (control cabinet door closed)	1797 x 1455 x 1700 mm	1797 x 1455 x 1700 mm	1797 x 1455 x 1700 mm	1797 x 1455 x 1700 mm
Dimensions (L x W x H) (control cabinet door open)	1797 x 2012 x 1700 mm	1797 x 2012 x 1700 mm	1797 x 2012 x 1700 mm	1797 x 2012 x 1700 mm
Gas inlet / outlet	DN50 PN16 / DN50 PN16	DN50 PN16 / DN50 PN16	DN50 PN16 / DN50 PN16	DN50 PN16 / DN50 PN16

Technical data only for 50 Hz, as operating voltage of control panel 400 V / 50 Hz

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!



CONTACT FORM