

MINK MV 0502/0602 B

干式爪式真空泵



VACUUM SOLUTIONS



静音

由于采用先进的声学设计，噪音低，可安装在工作站

高效

最新爪式真空技术，低能耗，最大限度地降低了运行成本，几乎免维护，有效空气冷却

结构紧凑

占地空间小


MINK MV 0502/0602 B

干式爪式真空泵



VACUUM SOLUTIONS


尺寸图

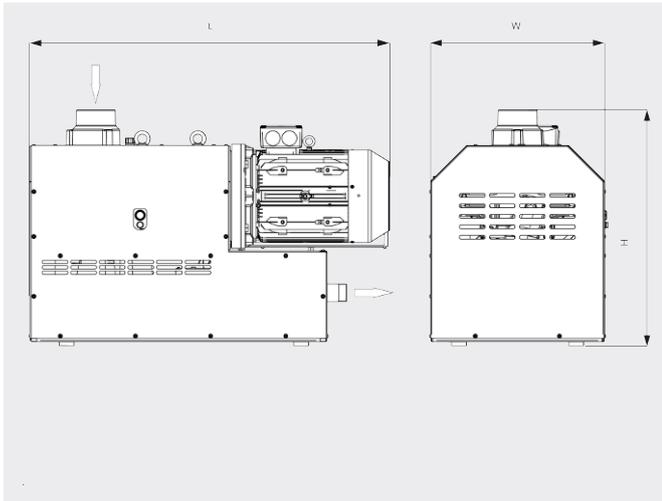

抽气速率

空气温度为 20°C 时。公差: ± 10%

— 50 Hz 60 Hz

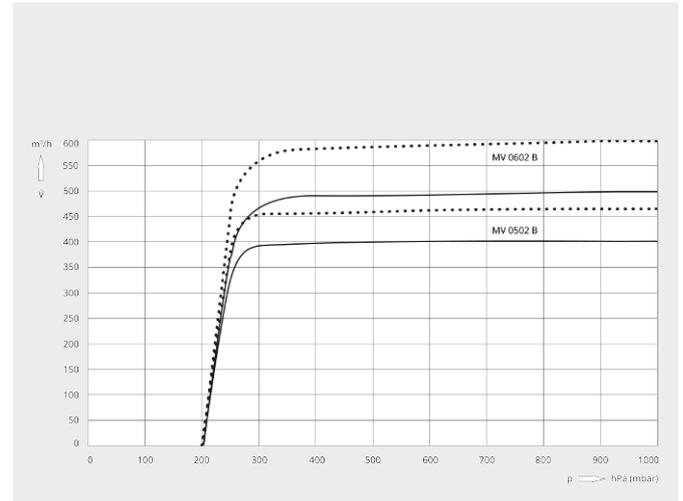

	MINK MV 0502 B	MINK MV 0602 B
额定抽速	400 / 470 m³/h (50 / 60 Hz)	500 / 600 m³/h (50 / 60 Hz)
极限压力	200 hPa (mbar) (50 / 60 Hz)	200 hPa (mbar) (50 / 60 Hz)
电机额定功率	7.5 kW (50 Hz) 7.5 / 9.5 kW (50 / 60 Hz)	9.2 kW (50 Hz) 11.0 / 12.6 kW (50 / 60 Hz)
电机额定转速	3000 / 3600 min ⁻¹ (50 / 60 Hz)	3000 / 3600 min ⁻¹ (50 / 60 Hz)
噪声级 (ISO 2151)	72 / 75 dB(A) (50 / 60 Hz)	73 / 76 dB(A) (50 / 60 Hz)
重量 (约)	450 / 470 kg (50 / 60 Hz)	468 / 472 kg (50 / 60 Hz)
尺寸 (L x W x H)	1085 x 580 x 795 mm	1100 x 580 x 795 mm
进气口 / 排气口	G 3" / R 2"	G 3" / R 2"

您想了解更多吗?

直接联系我们!

info@busch-china.com 或 +86 (0)21 67 60 08 00



填写联系表单



马上拨打电话