

# COBRA NC 0600 C

Dry screw vacuum pump



VACUUM SOLUTIONS



## High performance

Advanced screw design, patented self-balancing screws

## Efficient

Low cost of ownership, minimal maintenance, long service intervals, high uptime, efficient water cooling

## ATEX-certified

Keeps gas temperatures below 200°C, certified for temperature class T3, ideally suited for processes with temperature-sensitive process gases


# COBRA NC 0600 C

Dry screw vacuum pump




VACUUM SOLUTIONS

Dimensional drawing

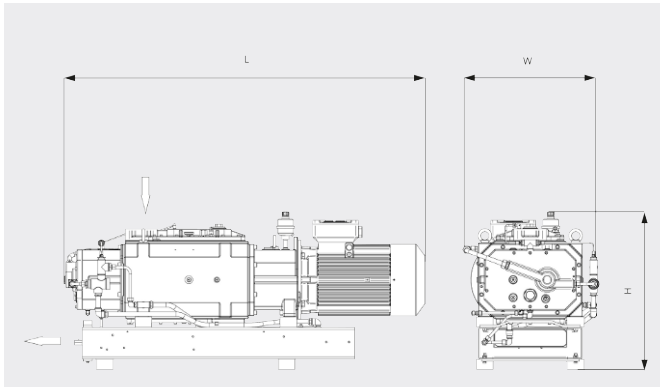

Pumping speed

Air at 20°C. Tolerance:  $\pm 10\%$

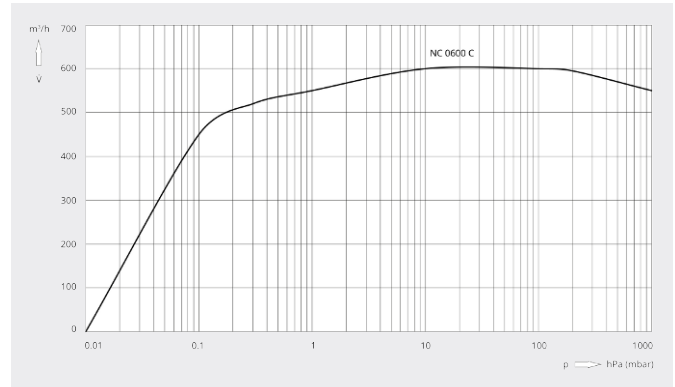

COBRA NC 0600 C	
Pumping speed	600 m <sup>3</sup> /h
Ultimate pressure	$\leq 0.01$ hPa (mbar)
Nominal motor rating	18.5 kW
Power consumption at ultimate pressure	9 kW
Nominal motor speed	3000 / 3600 min <sup>-1</sup> (50 / 60 Hz)
Noise level (ISO 2151)	$\leq 74$ / $\leq 76$ dB(A) (50 / 60 Hz)
Weight approx.	600 kg
Dimensions (L x W x H)	1502 x 602 x 640 mm
Gas inlet / outlet	DN 100 ISO-K / DN 100 ISO-K

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!  
[info@busch.ee](mailto:info@busch.ee) or +372 568 13 203



CONTACT FORM



CALL NOW