

MINK MV 0500/0600 B

Dry claw vacuum pumps



VACUUM SOLUTIONS



Flexible

Variable speed drive (VSD)

Efficient

Latest claw technology, additional pumping speed thanks to pressure control, up to 20% more performance, low energy consumption, minimized operating costs, nearly maintenance-free

Quiet

Low noise level due to a state-of-the-art acoustic design, can be installed at workstations


MINK MV 0500/0600 B

Dry claw vacuum pumps



VACUUM SOLUTIONS


Dimensional drawing

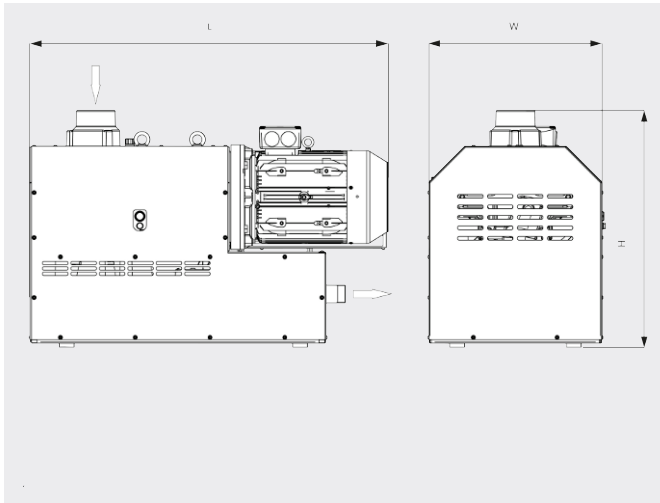

Pumping speed

Air at 20°C. Tolerance: ± 10%

— 20 Hz 60 Hz

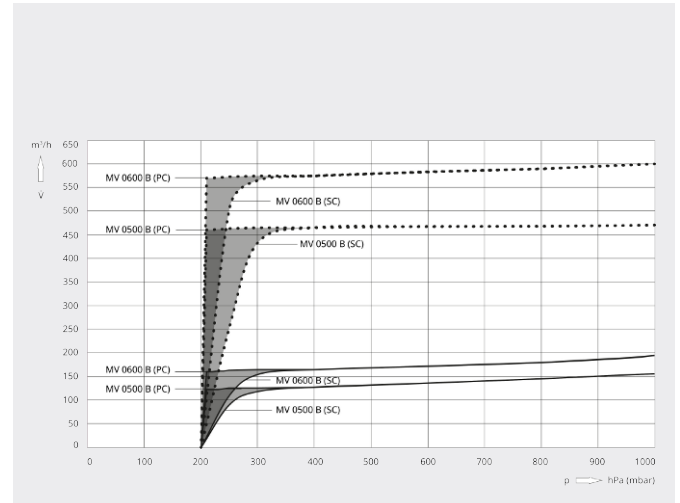

| | MINK MV 0500 B | MINK MV 0600 B |
|------------------------|--------------------------------------------|--------------------------------------------|
| Nominal pumping speed | 470 m³/h (20 / 60 Hz) | 600 m³/h (20 / 60 Hz) |
| Ultimate pressure | 200 hPa (mbar) (20 / 60 Hz) | 200 hPa (mbar) (20 / 60 Hz) |
| Nominal motor rating | 11.0 – 12.6 kW (20 / 60 Hz) | 15.0 – 17.3 kW (20 / 60 Hz) |
| Nominal motor speed | 1200 – 3600 min ⁻¹ (20 / 60 Hz) | 1200 – 3600 min ⁻¹ (20 / 60 Hz) |
| Noise level (ISO 2151) | 75 dB(A) (20 / 60 Hz) | 76 dB(A) (20 / 60 Hz) |
| Weight approx. | 495 kg | 550 kg |
| Dimensions (L x W x H) | 1195 x 580 x 795 mm | 1200 x 580 x 795 mm |
| Gas inlet / outlet | G 3" / R 2" | G 3" / R 2" |

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
info@busch.ee or +372 568 13 203



CONTACT FORM



CALL NOW