


# PUMA WY 3600 A

Vacuum booster



VACUUM SOLUTIONS

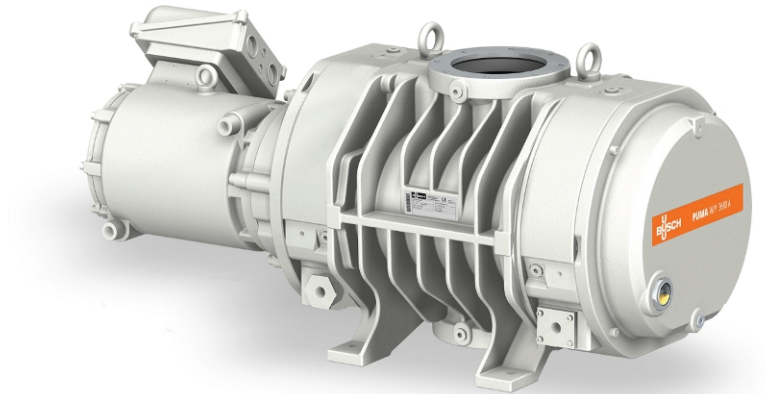

## Reliable

Special lobe design to prevent powder and particle deposits, robust construction made of GGG40 material, leak-tight

## High performance

Specially designed for harsh applications in the medium and high vacuum range, including semiconductor processes with powder and dust, excellent volumetric efficiency

## Flexible


Reliable performance under varying operating conditions, boosts the performance of all types of backing pumps

# PUMA WY 3600 A

Vacuum booster




Dimensional drawing

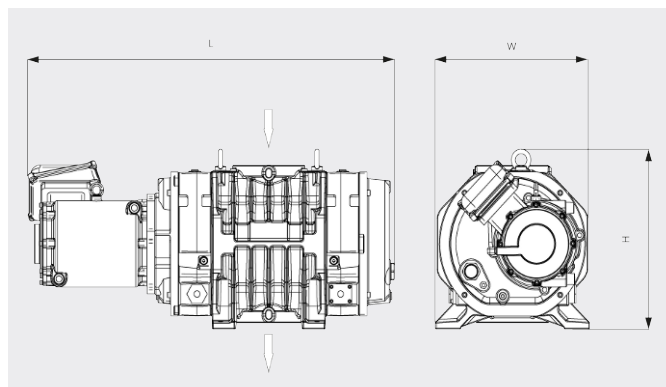

Pumping speed

Air at 20°C. Tolerance:  $\pm 10\%$

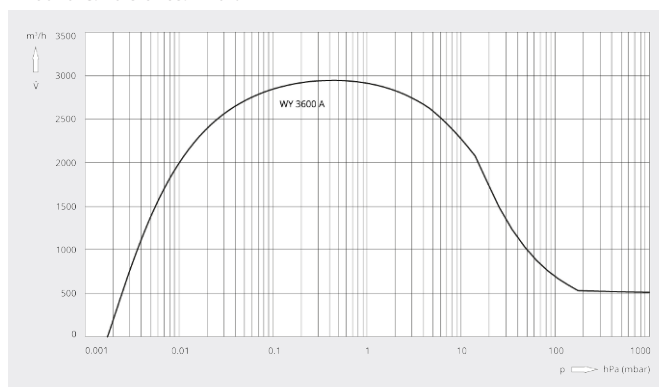

PUMA WY 3600 A	
Nominal pumping speed	3600 m³/h
Pumping speed	2945 m³/h *
Max. differential pressure	30 hPa (mbar)
Nominal motor rating	15 kW
Nominal motor speed	5400 min <sup>-1</sup>
Weight approx.	500 kg
Leakage rate	$< 1 \cdot 10^{-6}$ mbar · l/s
Dimensions (L x W x H)	1139 x 524 x 480 mm
Gas inlet / outlet	DN 160 ISO / DN 160 ISO

\*Pumping speed with COBRA NS 0600 C as backing pump running at 50 / 60 Hz  
Frequency converter is necessary

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!  
[info@busch.ee](mailto:info@busch.ee) or +372 568 13 203



CONTACT FORM



CALL NOW