


# MINK MH 0018 A

Dry claw compressor



VACUUM SOLUTIONS

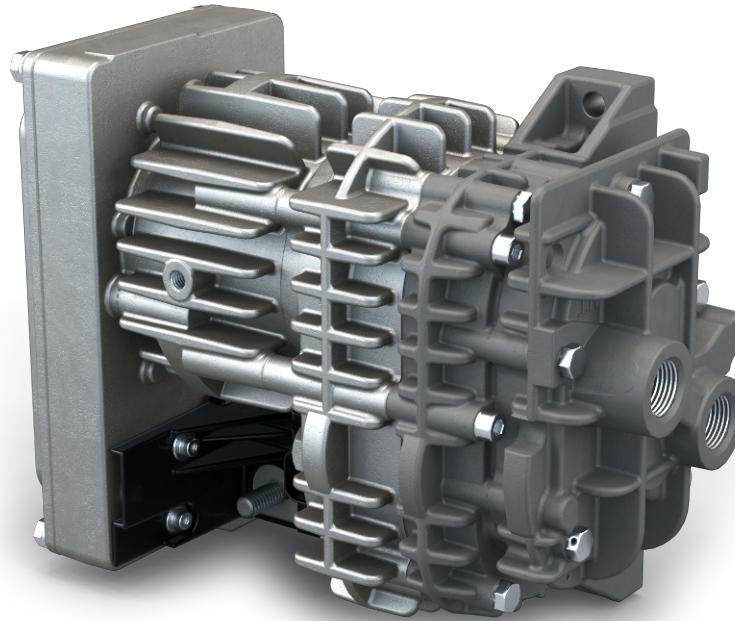

## Hydrogen-approved

For recirculation of hydrogen in fuel cells under extreme conditions, only hydrogen-approved compressor in the market

## Efficient

Latest claw technology, intelligent variable speed drive

## Compact


Small footprint due to "all-in-one" design with integrated variable speed drive

# MINK MH 0018 A


Dry claw compressor



Dimensional drawing

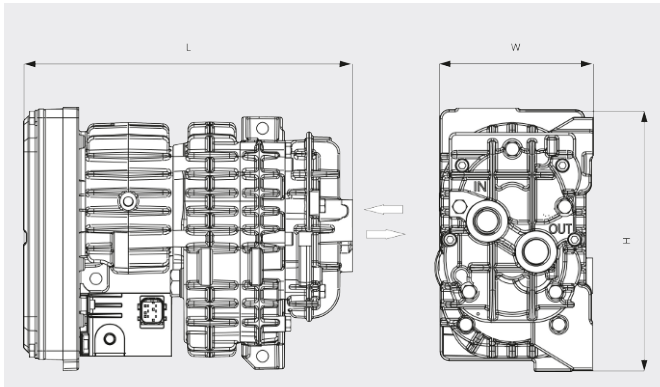

Pumping speed  
Air at 20°C. Tolerance:  $\pm 10\%$

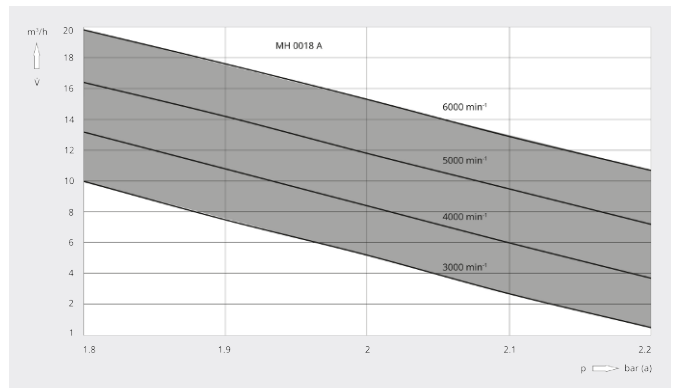

| MINK MH 0018 A                         |                                               |
|----------------------------------------|-----------------------------------------------|
| Volume flow (at inlet)                 | max. 18 m³/h                                  |
| Overpressure                           | max. 0.4 bar(g)                               |
| Leakage rate (EU 79/2009 and 406/2010) | < 10 Ncm³/h                                   |
| Nominal motor rating                   | max. 0.5 kW                                   |
| Nominal motor speed                    | 480 – 6000 min⁻¹                              |
| Noise level (ISO 2151)                 | 68 – 73 / 68 – 73 dB(A) ( 3000 / 6000 min⁻¹ ) |
| Oil capacity                           | 0.1 l                                         |
| Weight approx.                         | 6.5 kg                                        |
| Dimensions (L x W x H)                 | 249.5 x 120 x 199 mm                          |

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!  
[info@busch.ee](mailto:info@busch.ee) or +372 568 13 203



CONTACT FORM



CALL NOW