

TYR WT 0600/0730 CV/CP PLUS

Rotary lobe blower



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Control and monitoring

Remote/local control, condition monitoring, communication protocols, control panel with touch screen and intuitive user interface, pressure and speed control mode, weekly planner

Cost savings

Reduced energy consumption and minimized operating costs, variable speed drive, preventive maintenance, reduced downtime

Robust

Integrated on single frame with forklift slots for easy handling, easy to connect

Accessories, spare parts and options

- Non-return valve
- Oil filling kit
- Resonance pulsation silencer
- IoT Kit
- Reactive inlet and outlet silencers
- Main circuit breaker
- Rubber and stainless steel expansion joints

TYR WT 0600/0730 CV/CP PLUS


Rotary lobe blower



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP

Dimensional drawing

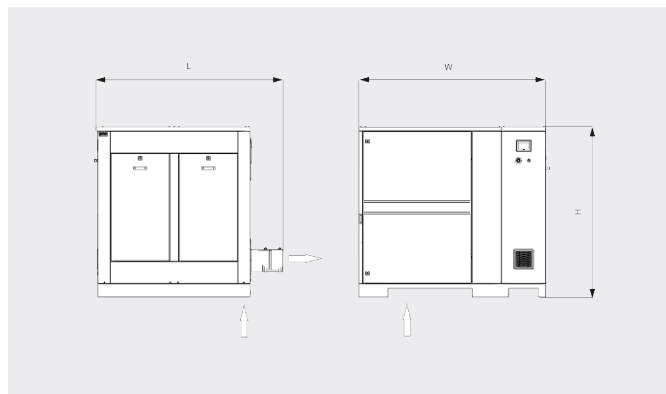

	TYR WT 0600 CV PLUS	TYR WT 0600 CP PLUS	TYR WT 0730 CV PLUS	TYR WT 0730 CP PLUS
Volume flow	900 – 3100 m ³ /h	900 – 3100 m ³ /h	1200 – 4000 m ³ /h	1200 – 4000 m ³ /h
Max. differential pressure	-500 mbar	+800 mbar	-500 mbar	+600 mbar
Nominal motor rating	18.5 – 55.0 kW	30.0 – 90.0 kW	30.0 – 75.0 kW	37.0 – 90.0 kW
Blower speed	1000 – 3500 min ⁻¹	1000 – 3500 min ⁻¹	1000 – 3500 min ⁻¹	1000 – 3500 min ⁻¹
Weight approx. (with acoustic enclosure)	1820 kg	1780 kg	1916 kg	1876 kg
Dimensions (L x W x H) (with acoustic enclosure)	1900 x 1570 x 1732 mm	1900 x 1570 x 1732 mm	1900 x 1570 x 1732 mm	1900 x 1570 x 1732 mm
Gas inlet / outlet	Ø 219 mm	Ø 219 mm	Ø 219 mm	Ø 219 mm

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
info@busch.fi or +358 (0)9 774 60 60



CONTACT FORM



CALL NOW