

# MINK MV 1202 B

Dry claw vacuum pump



**VACUUM SOLUTIONS**

Part of the **BUSCH** GROUP



## Quiet

Low noise level due to a state-of-the-art acoustic design, can be installed at workstations

## Efficient

Latest claw vacuum technology, low energy consumption, minimized operating costs, nearly maintenance-free, effective air cooling

## Compact

Small footprint

Accessories, spare parts and options

- Aqua version
- IoT kit
- ATEX Category 3

# MINK MV 1202 B


Dry claw vacuum pump



**VACUUM SOLUTIONS**

Part of the **BUSCH GROUP**


Dimensional drawing

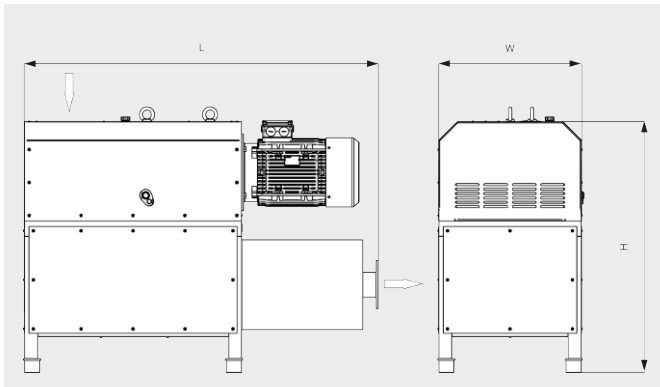

Pumping speed

Air at 20°C. Tolerance:  $\pm 10\%$

— 50 Hz ..... 60 Hz

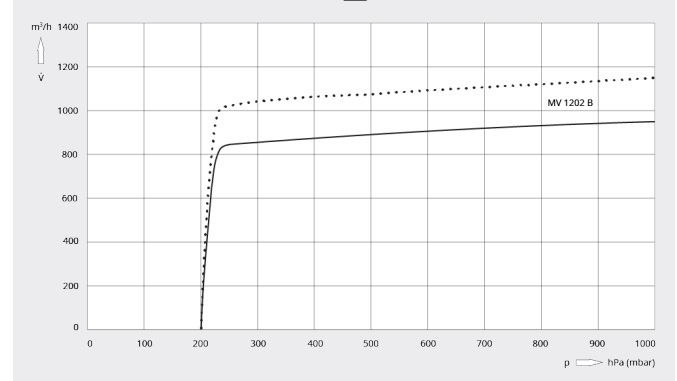

| MINK MV 1202 B                                                |                                     |
|---------------------------------------------------------------|-------------------------------------|
| Nominal pumping speed                                         | 950 / 1150 m³/h (50 / 60 Hz)        |
| Ultimate pressure                                             | 200 hPa (mbar) (50 / 60 Hz)         |
| Nominal motor rating                                          | 18.5 / 22.0 kW (50 / 60 Hz)         |
| Nominal motor speed                                           | 3000 / 3600 min⁻¹ (50 / 60 Hz)      |
| Sound pressure level (ISO 3744), 1 m distance, at medium load | 79 / 82 dB(A) (50 / 60 Hz)          |
| Weight approx.                                                | 900 kg                              |
| Dimensions (L x W x H)                                        | 1620 x 670 x 1210 mm                |
| Gas inlet / outlet                                            | DN 100, PN 10/16 / DN 100, PN 10/16 |

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

[busch@buschvacuum.hu](mailto:busch@buschvacuum.hu) or +36 24 887 308



CONTACT FORM



CALL NOW