

MINK MV 0360 A ECOTORQUE

Dry claw vacuum pump



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Efficient

10% energy saving over entire pressure and frequency range thanks to highly efficient IE5 motor and variable speed drive (ECOTORQUE), minimized operating costs, easy setup via user-friendly Busch Vacuum Manager software

Quiet

Low noise level thanks to fully enclosed state-of-the-art acoustic design

Robust

Latest claw technology, nearly maintenance-free

Accessories, spare parts and options

- Aqua version
- Busch Vacuum Manager software
- ECOTORQUE Master Control
- IoT kit

MINK MV 0360 A ECOTORQUE


Dry claw vacuum pump



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP


Dimensional drawing

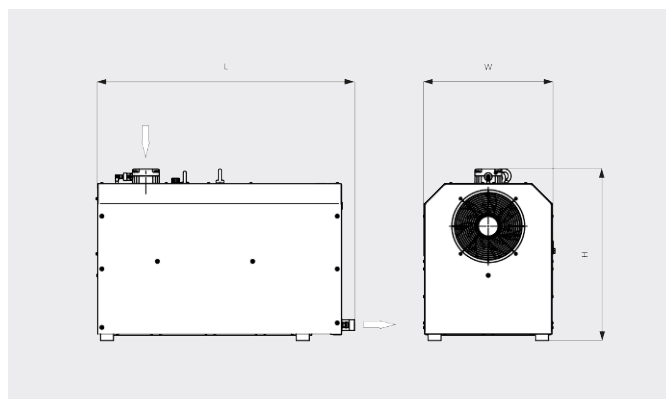

Pumping speed

Air at 20°C. Tolerance: $\pm 10\%$

— Min. speed Max. speed

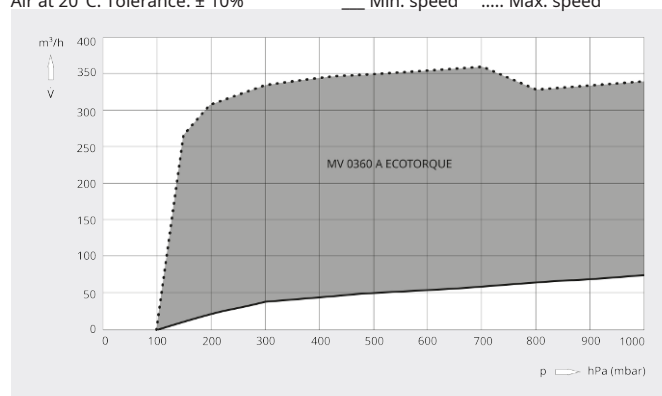

MINK MV 0360 A ECOTORQUE	
Nominal pumping speed	360 m³/h (4000 min⁻¹)
Ultimate pressure	100 hPa (mbar)
Nominal motor rating	7.5 kW
Nominal motor speed	900-4000 min⁻¹
Sound pressure level (ISO 3744), 1m distance, at medium load	70 dB(A) (4000 min⁻¹)
Ambient temperature range	0-40 °C
Inlet gas temperature range	0-40 °C
Ambient pressure	Atmospheric pressure
Oil capacity	1.1 l
Weight approx.	300 kg
Dimensions (L x W x H)	980 x 500 x 650 mm
Gas inlet / outlet	G 2" / R 1¼"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!



CONTACT FORM