

# MINK MV 0502/0602 B

Dry claw vacuum pumps



VACUUM SOLUTIONS



## Quiet

Low noise level due to a state-of-the-art acoustic design, can be installed at workstations

## Efficient

Latest claw vacuum technology, low energy consumption, minimized operating costs, nearly maintenance-free, effective air cooling

## Compact


Small footprint

# MINK MV 0502/0602 B

Dry claw vacuum pumps




Dimensional drawing

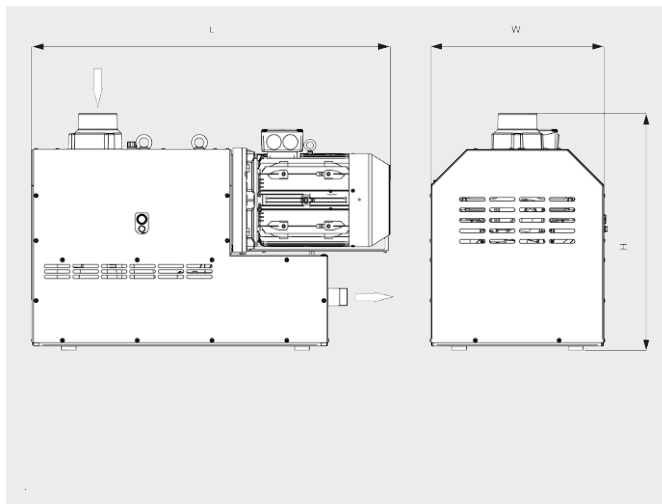

Pumping speed

Air at 20°C. Tolerance: ± 10%

— 50 Hz ..... 60 Hz

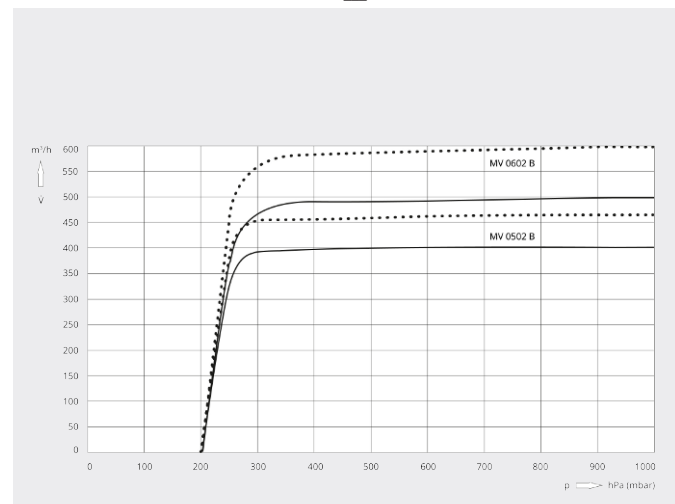

|                        | MINK MV 0502 B                             | MINK MV 0602 B                             |
|------------------------|--------------------------------------------|--------------------------------------------|
| Nominal pumping speed  | 400 / 470 m³/h (50 / 60 Hz)                | 500 / 600 m³/h (50 / 60 Hz)                |
| Ultimate pressure      | 200 hPa (mbar) (50 / 60 Hz)                | 200 hPa (mbar) (50 / 60 Hz)                |
| Nominal motor rating   | 7.5 kW (50 Hz) 7.5 / 9.5 kW (50 / 60 Hz)   | 9.2 kW (50 Hz) 11.0 / 12.6 kW (50 / 60 Hz) |
| Nominal motor speed    | 3000 / 3600 min <sup>-1</sup> (50 / 60 Hz) | 3000 / 3600 min <sup>-1</sup> (50 / 60 Hz) |
| Noise level (ISO 2151) | 72 / 75 dB(A) (50 / 60 Hz)                 | 73 / 76 dB(A) (50 / 60 Hz)                 |
| Weight approx.         | 450 / 470 kg (50 / 60 Hz)                  | 468 / 472 kg (50 / 60 Hz)                  |
| Dimensions (L x W x H) | 1085 x 580 x 795 mm                        | 1100 x 580 x 795 mm                        |
| Gas inlet / outlet     | G 3" / R 2"                                | G 3" / R 2"                                |

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!  
[sales@busch.ie](mailto:sales@busch.ie) or +353 (0)1 832 13 30



CONTACT FORM



CALL NOW