

MINK MI 2124/2122 BV

Dry claw vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Efficient

Substantial energy savings compared to conventional vacuum generators, minimized operating costs

Nearly maintenance-free

Dry and contact-free operation

High performance

Low ultimate pressure due to two-stage construction

MINK MI 2124/2122 BV


Dry claw vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH GROUP**


Dimensional drawing

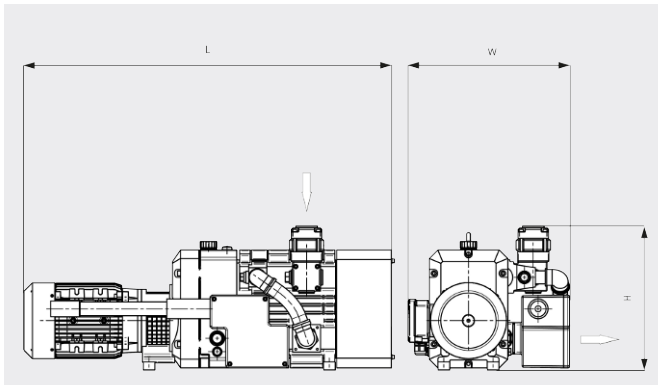

Pumping speed

Air at 20°C. Tolerance: $\pm 10\%$

— 50 Hz 60 Hz

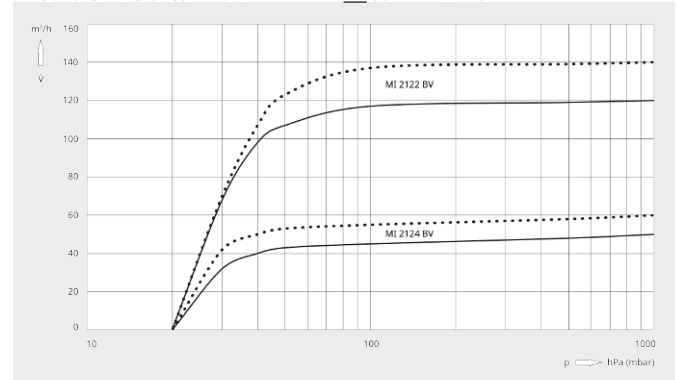

	MINK MI 2124 BV	MINK MI 2122 BV
Nominal pumping speed	50 / 60 m³/h (50 / 60 Hz)	120 / 145 m³/h (50 / 60 Hz)
Ultimate pressure	20 hPa (mbar) (50 / 60 Hz)	20 hPa (mbar) (50 / 60 Hz)
Nominal motor rating	2.0 / 2.4 kW (50 / 60 Hz)	5.1 / 6.8 kW (50 / 60 Hz)
Nominal motor speed	1500 / 1800 min ⁻¹ (50 / 60 Hz)	3000 / 3600 min ⁻¹ (50 / 60 Hz)
Sound pressure level (ISO 3744), 1 m distance, at medium load	75 / 77 dB(A) (50 / 60 Hz)	81 / 84 dB(A) (50 / 60 Hz)
Weight approx.	125 kg	145 kg
Dimensions (L x W x H)	940 x 415 x 370 mm	970 x 430 x 370 mm
Gas inlet / outlet	G 1½" / G 1"	G 1½" / G 1"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

service_sales@busch.co.il or +972 (0)8 681 04 85



CONTACT FORM



CALL NOW