

MINK MV 0500/0600 B

Dry claw vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Flexible

Variable speed drive (VSD)

Efficient

Latest claw technology, additional pumping speed thanks to pressure control, up to 20% more performance, low energy consumption, minimized operating costs, nearly maintenance-free

Quiet

Low noise level due to a state-of-the-art acoustic design, can be installed at workstations

MINK MV 0500/0600 B

Dry claw vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH GROUP**


Dimensional drawing



Pumping speed

Air at 20°C. Tolerance: $\pm 10\%$

— 50 Hz 60 Hz

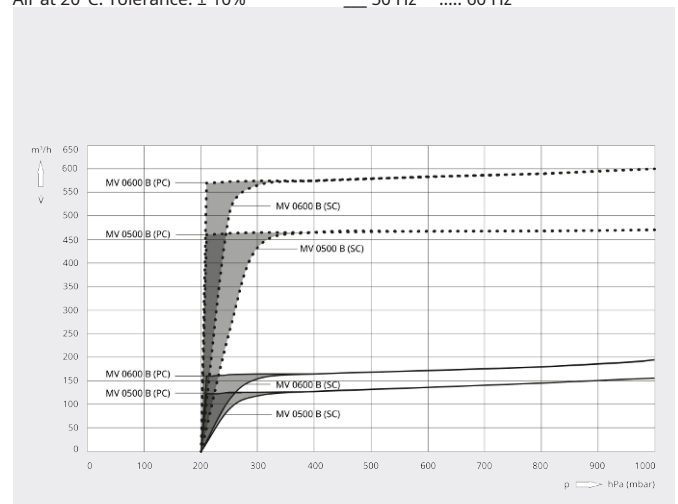

	MINK MV 0500 B	MINK MV 0600 B
Nominal pumping speed	470 m³/h (20 / 60 Hz)	600 m³/h (20 / 60 Hz)
Ultimate pressure	200 hPa (mbar) (20 / 60 Hz)	200 hPa (mbar) (20 / 60 Hz)
Nominal motor rating	11.0 – 12.6 kW (20 / 60 Hz)	15.0 – 17.3 kW (20 / 60 Hz)
Nominal motor speed	1200 – 3600 min ⁻¹ (20 / 60 Hz)	1200 – 3600 min ⁻¹ (20 / 60 Hz)
Sound pressure level (ISO 3744), 1 m distance, at medium load	76 dB(A) (20 / 60 Hz)	77 dB(A) (20 / 60 Hz)
Weight approx.	495 kg	550 kg
Dimensions (L x W x H)	1195 x 580 x 795 mm	1200 x 580 x 795 mm
Gas inlet / outlet	G 3" / R 2"	G 3" / R 2"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

service_sales@busch.co.il or +972 (0)8 681 04 85



CONTACT FORM



CALL NOW