

MINK MV 0502/0602 B

Dry claw vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Quiet

Low noise level due to a state-of-the-art acoustic design, can be installed at workstations

Efficient

Latest claw vacuum technology, low energy consumption, minimized operating costs, nearly maintenance-free, effective air cooling

Compact

Small footprint

MINK MV 0502/0602 B

Dry claw vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH GROUP**


Dimensional drawing



Pumping speed

Air at 20°C. Tolerance: $\pm 10\%$

— 50 Hz 60 Hz

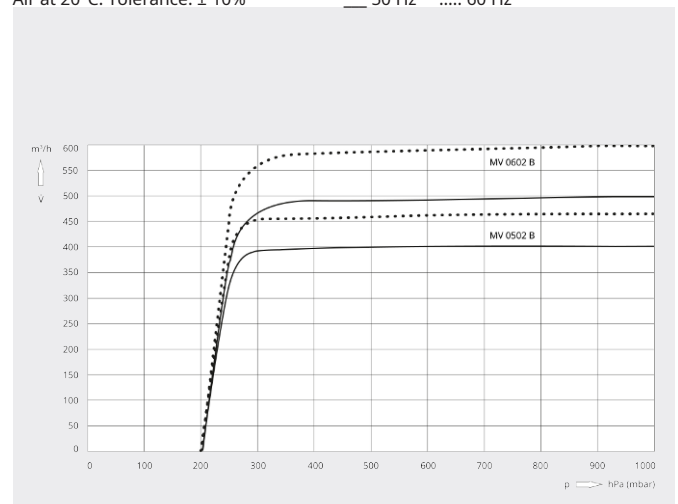

	MINK MV 0502 B	MINK MV 0602 B
Nominal pumping speed	400 / 470 m³/h (50 / 60 Hz)	500 / 600 m³/h (50 / 60 Hz)
Ultimate pressure	200 hPa (mbar) (50 / 60 Hz)	200 hPa (mbar) (50 / 60 Hz)
Nominal motor rating	7.5 kW (50 Hz) 7.5 / 9.5 kW (50 / 60 Hz)	9.2 kW (50 Hz) 11.0 / 12.6 kW (50 / 60 Hz)
Nominal motor speed	3000 / 3600 min ⁻¹ (50 / 60 Hz)	3000 / 3600 min ⁻¹ (50 / 60 Hz)
Sound pressure level (ISO 3744), 1 m distance, at medium load	72 / 76 dB(A) (50 / 60 Hz)	73 / 77 dB(A) (50 / 60 Hz)
Weight approx.	450 / 470 kg (50 / 60 Hz)	468 / 472 kg (50 / 60 Hz)
Dimensions (L x W x H)	1085 x 580 x 795 mm	1100 x 580 x 795 mm
Gas inlet / outlet	G 3" / R 2"	G 3" / R 2"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

service_sales@busch.co.il or +972 (0)8 681 04 85



CONTACT FORM



CALL NOW