

# MINK MB 0018 A

Dry claw vacuum pump



**VACUUM SOLUTIONS**

Part of the **BUSCH** GROUP



## Robust

Specially designed for mobile applications, may be operated under extreme conditions, in temperature ranges between -40 °C and +40 °C and at elevations between -1,000 m and 4,000 m, resistant to severe vibration

## Efficient

Latest claw vacuum technology, dry and contact-free compression, no contamination of pumped medium, intelligent variable speed drive, low energy consumption, long life cycle without servicing

## Compact

Small footprint due to "all-in-one" design

# MINK MB 0018 A


Dry claw vacuum pump



**VACUUM SOLUTIONS**


Part of the **BUSCH** GROUP

Dimensional drawing

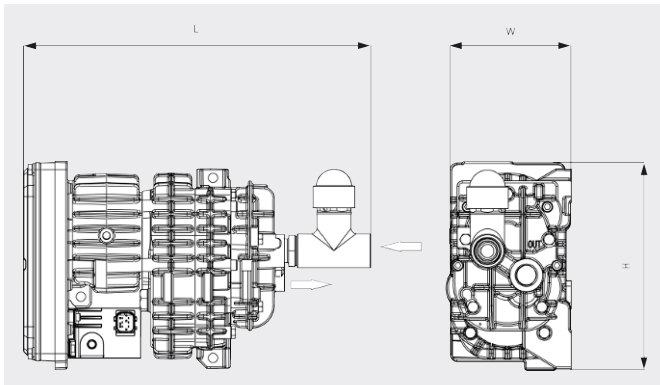

Pumping speed

Air at 20°C. Tolerance:  $\pm 10\%$

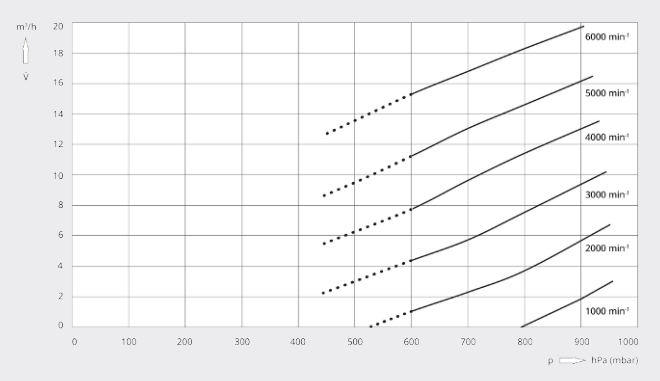

| MINK MB 0018 A                              |                        |
|---------------------------------------------|------------------------|
| Nominal pumping speed                       | 18 m <sup>3</sup> /h   |
| Ultimate pressure                           | 600 / 450 hPa (mbar)   |
| Nominal motor rating                        | 0.5 kW                 |
| Nominal motor speed                         | 6000 min <sup>-1</sup> |
| Ambient temperature                         | -40 ... +40 °C         |
| Sound pressure level (ISO 2151), KpA = 3 dB | 73 dB(A)               |
| Weight approx.                              | 6.5 kg                 |
| Dimensions (L x W x H)                      | 329.5 x 120 x 199 mm   |
| Gas inlet / outlet                          | G ¾" / G ½"            |

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!  
[service\\_sales@busch.co.il](mailto:service_sales@busch.co.il) or +972 (0)8 681 04 85



CONTACT FORM



CALL NOW