

COBRA NC 0600 C

Dry screw vacuum pump



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



High performance

Advanced screw design, patented self-balancing screws

ATEX-certified

Keeps gas temperatures below 200°C, certified for temperature class T3, ideally suited for processes with temperature-sensitive process gases

Efficient

Low cost of ownership, minimal maintenance, long service intervals, high uptime, efficient water cooling

COBRA NC 0600 C


Dry screw vacuum pump




VACUUM SOLUTIONS

Part of the **BUSCH** GROUP

Dimensional drawing

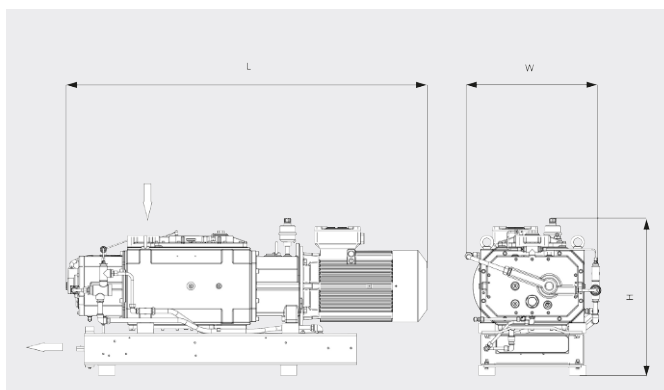

Pumping speed
Air at 20°C. Tolerance: $\pm 10\%$

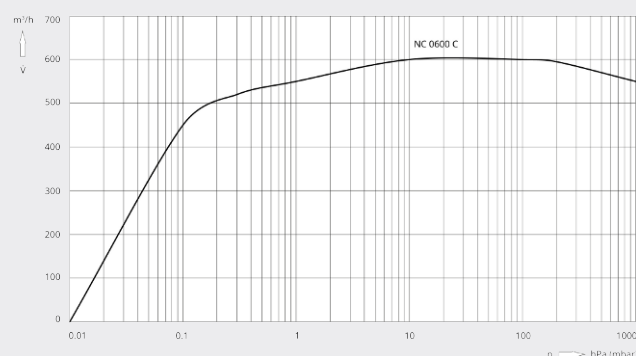

COBRA NC 0600 C	
Pumping speed	600 m ³ /h
Ultimate pressure	≤ 0.01 hPa (mbar)
Nominal motor rating	18.5 kW
Power consumption at ultimate pressure	9 kW
Nominal motor speed	3000 / 3600 min ⁻¹ (50 / 60 Hz)
Sound pressure level (ISO 2151), KpA = 3 dB	≤ 74 / ≤ 76 dB(A) (50 / 60 Hz)
Weight approx.	600 kg
Dimensions (L x W x H)	1502 x 602 x 640 mm
Gas inlet / outlet	DN 100 ISO-K / DN 100 ISO-K

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
service_sales@busch.co.il or +972 (0)8 681 04 85



CONTACT FORM



CALL NOW