

PLASTEX PMM/PMI 0060-0140 A

Vacuum systems



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Efficient

Improvement of product quality, efficient degassing, low residual contents of volatile components, low energy consumption, minimized operating costs, minimal maintenance

Reliable

Robust construction, reliable operation, contact-free operating principle of claw technology

Flexible

Application-oriented, modular design, easy installation and operation

PLASTEX PMM/PMI 0060-0140 A


Vacuum systems



VACUUM SOLUTIONS


Part of the **BUSCH GROUP**

Dimensional drawing

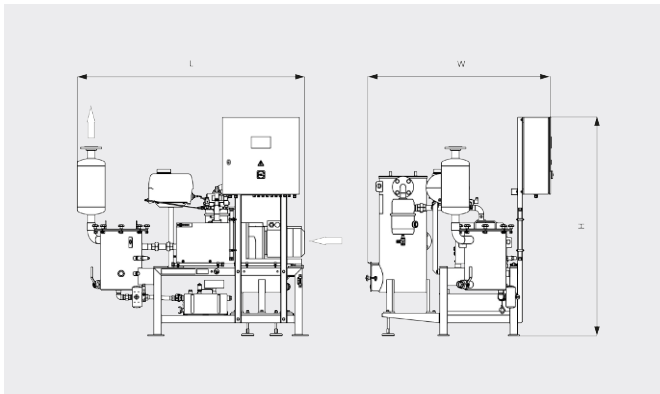

Pumping speed

Air at 20°C. Tolerance: $\pm 10\%$

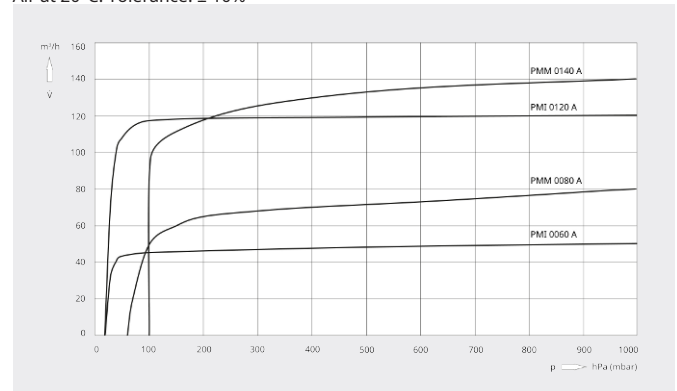

	PLASTEX PMM 0080 A	PLASTEX PMM 0140 A	PLASTEX PMI 0060 A	PLASTEX PMI 0120 A
Nominal pumping speed	80 m³/h	140 m³/h	50 m³/h	120 m³/h
Ultimate pressure	60 hPa (mbar)	100 hPa (mbar)	20 hPa (mbar)	20 hPa (mbar)
Nominal motor rating	2.2 kW	3.5 kW	1.5 kW	4.2 kW
Nominal motor speed	1500 min ⁻¹	3000 min ⁻¹	1500 min ⁻¹	3000 min ⁻¹
Noise level (ISO 2151)	76 dB(A)	80 dB(A)	75 dB(A)	81 dB(A)
Weight approx.	506 kg	514 kg	552 kg	572 kg
Dimensions (L x W x H) (control cabinet door closed)	1797 x 1455 x 1700 mm	1797 x 1455 x 1700 mm	1797 x 1455 x 1700 mm	1797 x 1455 x 1700 mm
Dimensions (L x W x H) (control cabinet door open)	1797 x 2012 x 1700 mm	1797 x 2012 x 1700 mm	1797 x 2012 x 1700 mm	1797 x 2012 x 1700 mm
Gas inlet / outlet	DN50 PN16 / DN50 PN16	DN50 PN16 / DN50 PN16	DN50 PN16 / DN50 PN16	DN50 PN16 / DN50 PN16

Technical data only for 50 Hz, as operating voltage of control panel 400 V / 50 Hz

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
service_sales@busch.co.il or +972 (0)8 681 04 85



CONTACT FORM



CALL NOW