

MINK MW 0332 A

Dry claw vacuum pump



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



High performance

Ultimate pressure < 0.8 hPa(mbar), high pumping speeds, constant pumping speed down to 10 hPa(mbar)

Efficient

Low power consumption, reduced carbon footprint, minimized operating costs, easy installation, latest claw vacuum technology, air-cooled

Nearly maintenance-free

Dry and contact-free operation

MINK MW 0332 A


Dry claw vacuum pump



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP


Dimensional drawing

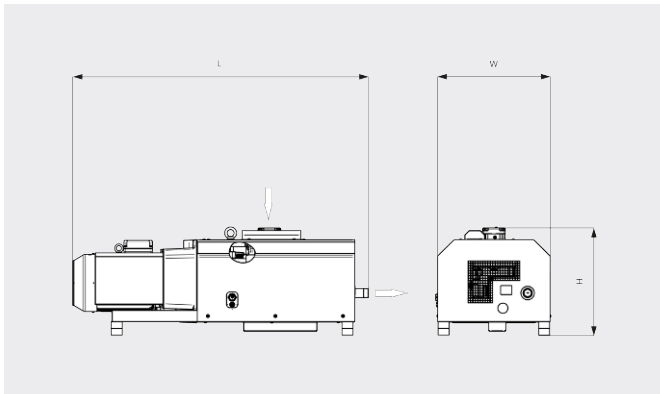

Pumping speed

Air at 20°C. Tolerance: $\pm 10\%$

— 50 Hz 60 Hz

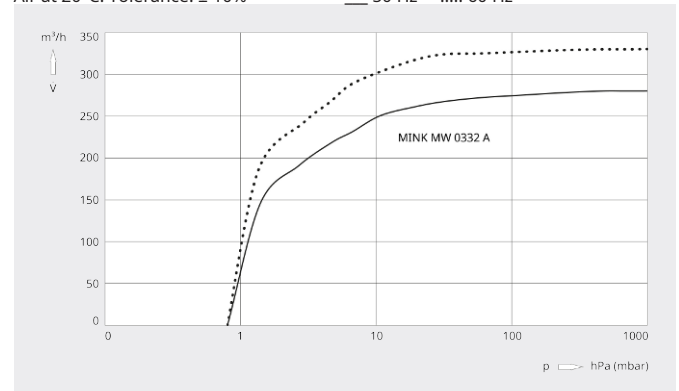

MINK MW 0332 A	
Nominal pumping speed	280 / 330 m³/h (50 / 60 Hz)
Ultimate pressure	0.8 hPa (mbar) (50 / 60 Hz)
Power consumption at ultimate pressure	3.7 / 4.7 kW (50 / 60 Hz)
Nominal motor speed	3000 / 3600 min ⁻¹ (50 / 60 Hz)
Permitted motor speed range	1200 ... 3600 min ⁻¹
Sound pressure level (ISO 2151) at ultimate pressure	72 / 75 dB(A) (50 / 60 Hz)
Ambient temperature range	0 ... 40 °C
Inlet gas temperature range	0 ... 40 °C
Ambient pressure	Atmospheric pressure
Oil capacity	1.2 l
Weight approx.	300 kg
Dimensions (L x W x H)	1313 x 510 x 477 mm

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
service_sales@busch.co.il or +972 (0)8 681 04 85



CONTACT FORM



CALL NOW