

# R5 RA 0063/0100 F

Oil-lubricated rotary vane vacuum pumps



VACUUM SOLUTIONS



## Reliable

Robust construction, highly durable fiber-reinforced epoxy resin vanes, proven rotary vane technology, long service life

## High performance

High pumping speed at low pressures, designed for continuous operation

## Flexible

Various design options available, easy adaption to individual customer requirements and processes

### Accessories

- Gas-ballast valve
- Filter pressure gauge
- Vacuum pump oils for all applications
- Various inlet filters
- Oil level switch
- Vacuum regulating unit


# R5 RA 0063/0100 F

Oil-lubricated rotary vane vacuum pumps



VACUUM SOLUTIONS


Dimensional drawing

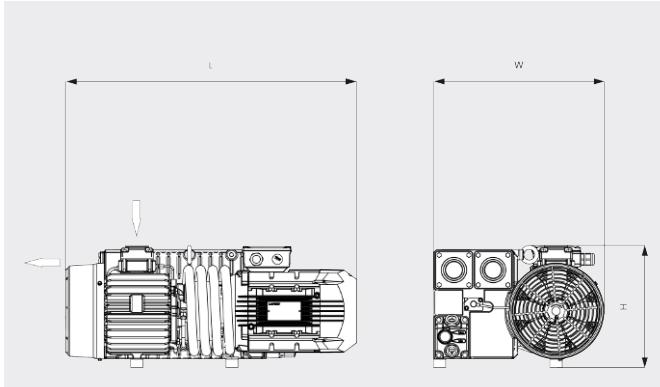

Pumping speed

Air at 20°C. Tolerance: ± 10%

— 50 Hz ..... 60 Hz

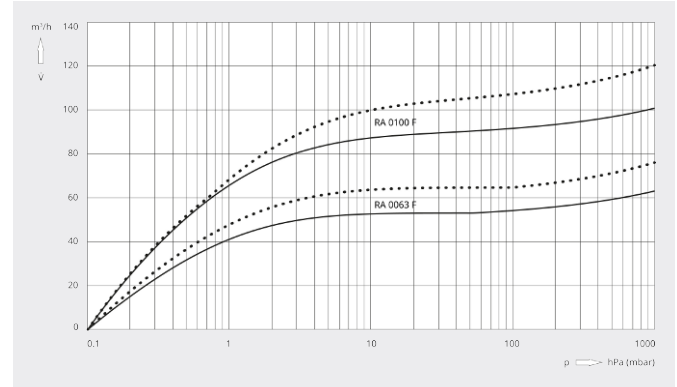

	R5 RA 0063 F	R5 RA 0100 F
Nominal pumping speed	63 / 76 m³/h (50 / 60 Hz)	100 / 120 m³/h (50 / 60 Hz)
Ultimate pressure	0.1 hPa (mbar) (50 / 60 Hz)	0.1 hPa (mbar) (50 / 60 Hz)
Nominal motor rating	2.0 / 2.4 kW (50 / 60 Hz)	2.7 / 3.4 kW (50 / 60 Hz)
Nominal motor speed	1500 / 1800 min <sup>-1</sup> (50 / 60 Hz)	1500 / 1800 min <sup>-1</sup> (50 / 60 Hz)
Power consumption at 100 mbar	1.3 / 1.5 kW (50 / 60 Hz)	1.9 / 2.4 kW (50 / 60 Hz)
Power consumption at ultimate pressure	0.7 / 0.8 kW (50 / 60 Hz)	1.2 / 1.5 kW (50 / 60 Hz)
Noise level (ISO 2151)	64 / 67 dB(A) (50 / 60 Hz)	65 / 68 dB(A) (50 / 60 Hz)
Oil capacity	2 l	2 l
Weight approx.	55 kg	73 kg
Dimensions (L x W x H)	627 x 406 x 290 mm	701 x 406 x 290 mm
Gas inlet / outlet	G 1¼" / G 1¼"	G 1¼" / G 1¼"

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!  
[service\\_sales@busch.co.il](mailto:service_sales@busch.co.il) or +972 (0)8 681 04 85



CONTACT FORM



CALL NOW