

PLASTEX MM/MI 0060-0140 A

Vacuum System



Efficient

Improvement of product quality, efficient degassing, low residual contents of volatile components, low energy consumption, minimized operating costs, minimal maintenance

Reliable

Robust construction, reliable operation, contact-free operating principle of claw technology


Flexible

Application-oriented, modular design, easy installation and operation

PLASTEX MM/MI 0060-0140 A


Vacuum System

Dimensional drawing

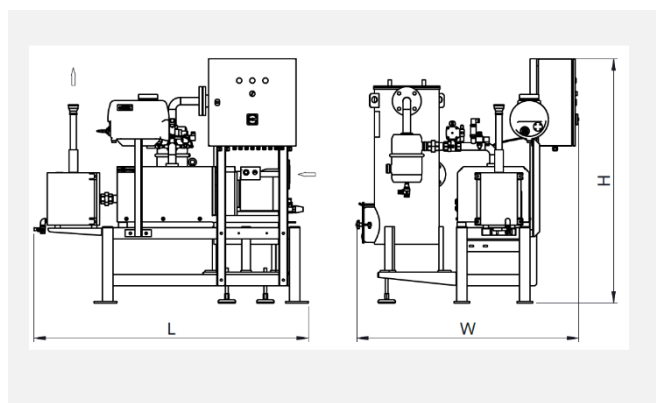

Pumping speed

Air at 20 °C. Tolerance: ± 10 %

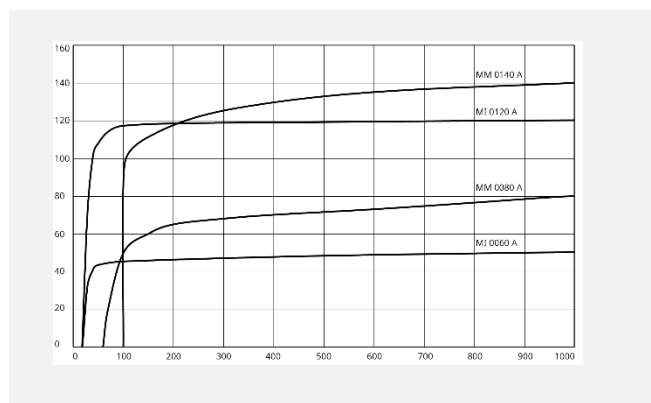

Technical data

| | MM 0080 A | MM 0140 A | MI 0060 A | MI 0120 A |
|----------------------------------------------------------------|------------------------|------------------------|------------------------|------------------------|
| Nominal pumping speed | 80 m³/h | 140 m³/h | 50 m³/h | 120 m³/h |
| Ultimate pressure | 60 hPa (mbar) | 100 hPa (mbar) | 20 hPa (mbar) | 20 hPa (mbar) |
| Nominal motor rating | 1.8 kW | 3.5 kW | 1.5 kW | 4.2 kW |
| Nominal motor speed | 1500 min ⁻¹ | 3000 min ⁻¹ | 1500 min ⁻¹ | 3000 min ⁻¹ |
| Noise level (ISO 2151) | 66 dB(A) | 75 dB(A) | 75 dB(A) | 81 dB(A) |
| Weight approx. | 407 kg | 407 kg | 395 kg | 412 kg |
| Dimensions (L x W x H) Control cabinet door - closed | 1570 x 1257 x 1400 mm | 1570 x 1257 x 1400 mm | 1570 x 1257 x 1400 mm | 1570 x 1257 x 1400 mm |
| Dimensions (L x W x H) Control cabinet door - open | 1570 x 1716 x 1400 mm | 1570 x 1716 x 1400 mm | 1570 x 1716 x 1400 mm | 1570 x 1716 x 1400 mm |
| Gas inlet / outlet | DN50 PN16 / G1 ½ | DN50 PN16 / G1 ½ | DN50 PN16 / G1 ½ | DN50 PN16 / G1 ½ |

Technical data only for 50 Hz, as operating voltage of control panel 380-415 V / 50 Hz

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

sales@busch.de or +49 7622 681-0