

# COBRA NC 0600 C

Dry screw vacuum pump



VACUUM SOLUTIONS



## High performance

Advanced screw design, patented self-balancing screws

## Efficient

Low cost of ownership, minimal maintenance, long service intervals, high uptime, efficient water cooling

## ATEX-certified

Keeps gas temperatures below 200°C, certified for temperature class T3, ideally suited for processes with temperature-sensitive process gases


# COBRA NC 0600 C

Dry screw vacuum pump




VACUUM SOLUTIONS

Dimensional drawing

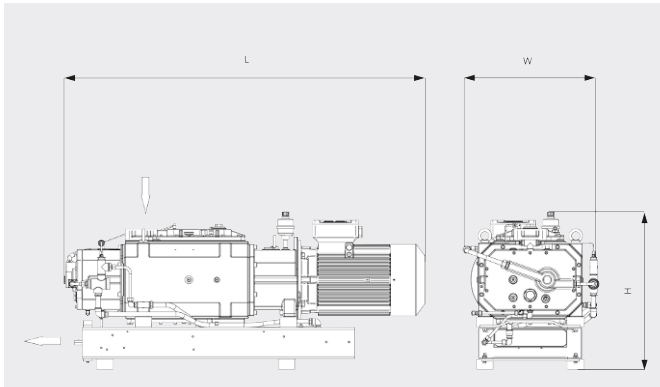

Pumping speed

Air at 20°C. Tolerance: ± 10%

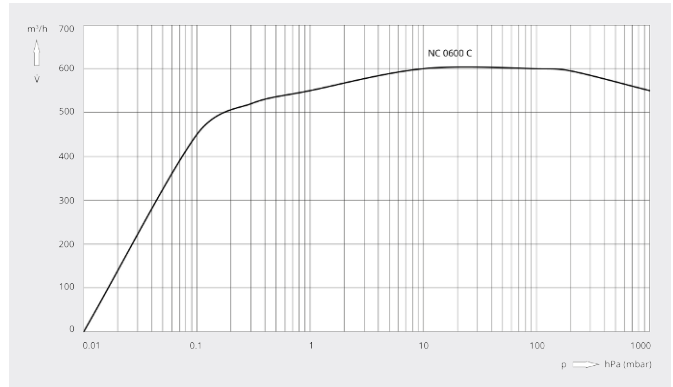

| COBRA NC 0600 C                        |  |
|--|--|
| Pumping speed                          | 600 m³/h                                   |
| Ultimate pressure                      | ≤ 0.01 hPa (mbar)                          |
| Nominal motor rating                   | 18.5 kW                                    |
| Power consumption at ultimate pressure | 9 kW                                       |
| Nominal motor speed                    | 3000 / 3600 min <sup>-1</sup> (50 / 60 Hz) |
| Noise level (ISO 2151)                 | ≤ 74 / ≤ 76 dB(A) (50 / 60 Hz)             |
| Weight approx.                         | 600 kg                                     |
| Dimensions (L x W x H)                 | 1502 x 602 x 640 mm                        |
| Gas inlet / outlet                     | DN 100 ISO-K / DN 100 ISO-K                |

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!  
[busch@busch.com.my](mailto:busch@busch.com.my) or +60 (0)3 55 25 95 00



CONTACT FORM



CALL NOW