

MINK MV 0310 B

Dry claw vacuum pump



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Flexible

Variable speed drive (VSD)

Efficient

Latest claw technology, additional pumping speed thanks to pressure control, up to 20% more performance, low energy consumption, minimized operating costs, nearly maintenance-free

Quiet

Low noise level due to a state-of-the-art acoustic design, can be installed at workstations

MINK MV 0310 B


Dry claw vacuum pump



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP


Dimensional drawing

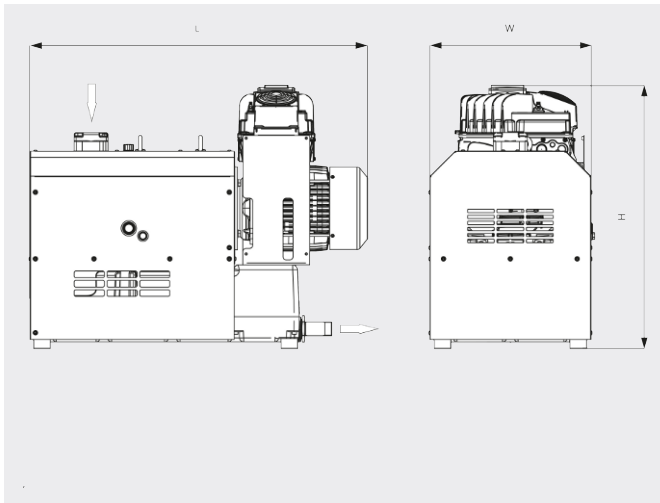

Pumping speed

Air at 20°C. Tolerance: $\pm 10\%$

— 20 Hz 60 Hz

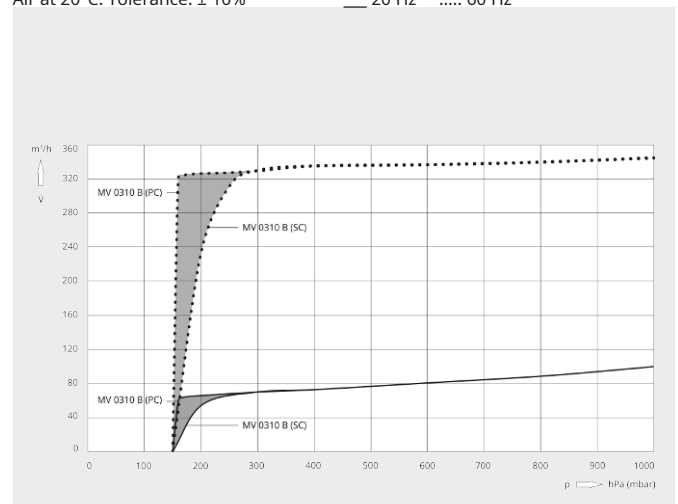

MINK MV 0310 B	
Nominal pumping speed	345 m³/h (20 / 60 Hz)
Ultimate pressure	150 hPa (mbar) (20 / 60 Hz)
Nominal motor rating	6.0 – 8.0 kW (20 / 60 Hz)
Nominal motor speed	1200 – 3600 min ⁻¹ (20 / 60 Hz)
Sound pressure level (ISO 3744), 1 m distance, at medium load	69 / 72 dB(A) (50 / 60 Hz)
Weight approx.	330 kg
Dimensions (L x W x H)	1015 x 500 x 790 mm
Gas inlet / outlet	G 2" / R 1 1/4"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
busch@busch.com.my or +60 (0)3 55 25 95 00



CONTACT FORM



CALL NOW