

COBRA NC 0100–0300 B ECOTORQUE

Dry screw vacuum pumps



Discover all advantages of
the product series COBRA
NC ECOTORQUE

Efficient

High energy savings thanks to the variable speed drive (ECOTORQUE), Ecomode with automatic start and stop function, reduced maintenance costs, long service intervals, extended pump lifetime, efficient cooling systems

Flexible

Precise adjustment of vacuum level (pressure control) and pumping speed (speed control) to process requirements, compatible with a wide range of supply voltages, easy control and monitoring of up to eight vacuum pumps with optional ECOTORQUE Master Control

High performance

Advanced screw design, patented self-balancing screws, fast pump-down times, perfectly suited for heat treatment, coating, vacuum drying and carbon capture

Accessories

- Purge gas system
- Sealing gas supply

COBRA NC 0100–0300 B ECOTORQUE

Dry screw vacuum pumps




- Dilution gas supply
- Connection adapter to connect ISO or ASME flanges
- Non-return valve
- Exhaust gas silencer
- Air cooling
- Various sealing and coating configurations

COBRA NC 0100–0300 B ECOTORQUE

Dry screw vacuum pumps



Dimensional drawing

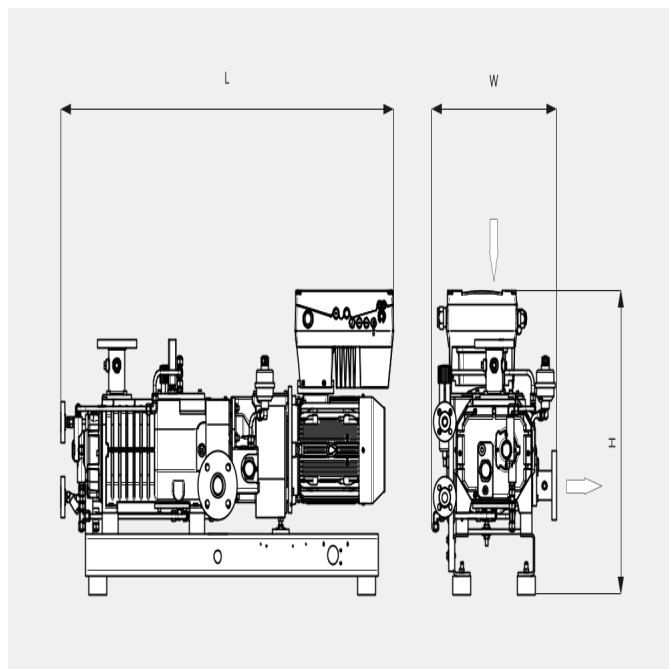

Pumping speed

Air at 20 °C. Tolerance: ± 10%

The following technical values refer to ISO 50 Hz

	COBRA NC 0100 B ECOTORQUE	COBRA NC 0200 B ECOTORQUE	COBRA NC 0300 B ECOTORQUE
Pumping speed	130 m ³ /h	265 m ³ /h	385 m ³ /h
Ultimate pressure	≤ 0.05 hPa (mbar)	≤ 0.05 hPa (mbar)	≤ 0.05 hPa (mbar)
Nominal motor rating	4.8 kW	7.6 kW	9.5 kW
Nominal motor speed	3600 min ⁻¹	3600 min ⁻¹	3600 min ⁻¹
Sound pressure level (ISO 2151), KpA = 3 dB	≤ 70 dB(A)	≤ 71 dB(A)	≤ 72 dB(A)
Weight approx.	300 kg	350 kg	400 kg
Dimensions (L x W x H)	1180 x 514 x 678 mm	1263 x 514 x 700 mm	1398 x 514 x 726 mm
Gas inlet	DN 40 PN 16	DN 50 PN 16	DN 50 PN 16
Gas outlet	DN 40 PN 16	DN 50 PN 16	DN 50 PN 16

COBRA NC 0100–0300 B ECOTORQUE

Dry screw vacuum pumps



The following technical values refer to ISO 60 Hz

	COBRA NC 0100 B ECOTORQUE	COBRA NC 0200 B ECOTORQUE	COBRA NC 0300 B ECOTORQUE
Pumping speed	130 m³/h	265 m³/h	385 m³/h
Ultimate pressure	≤ 0.01 hPa (mbar)	≤ 0.01 hPa (mbar)	≤ 0.01 hPa (mbar)
Nominal motor rating	4.8 kW	7.6 kW	9.5 kW
Nominal motor speed	3600 min ⁻¹	3600 min ⁻¹	3600 min ⁻¹
Sound pressure level (ISO 2151), KpA = 3 dB	≤ 74 dB(A)	≤ 76 dB(A)	≤ 77 dB(A)
Weight approx.	300 kg	350 kg	400 kg
Dimensions (L x W x H)	1180 x 514 x 678 mm	1263 x 514 x 700 mm	1398 x 514 x 726 mm
Gas inlet	DN 40 PN 16	DN 50 PN 16	DN 50 PN 16
Gas outlet	DN 40 PN 16	DN 50 PN 16	DN 50 PN 16

Do you want to know more

Please contact us!
busch@busch.com.my or +60 (0)3 55 25 95 00



Contact form



Call us now