


# MINK MB 0018 A

Dry claw vacuum pump

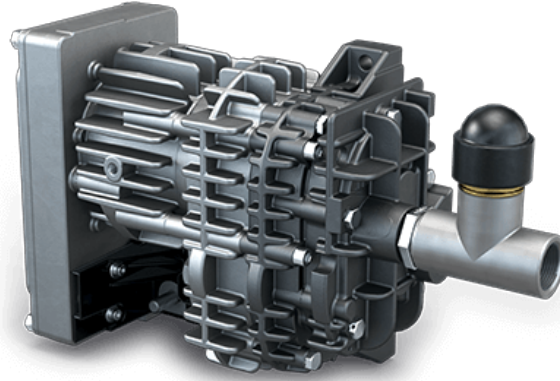

Discover all advantages of  
the product series MINK MB

## Robust

Specially designed for mobile applications, may be operated under extreme conditions, in temperature ranges between -40 °C and +40 °C and at elevations between -1,000 m and 4,000 m, resistant to severe vibration

## Efficient

Latest claw vacuum technology, dry and contact-free compression, no contamination of pumped medium, intelligent variable speed drive, low energy consumption, long life cycle without servicing

## Compact


Small footprint due to "all-in-one" design

# MINK MB 0018 A

Dry claw vacuum pump




## Dimensional drawing

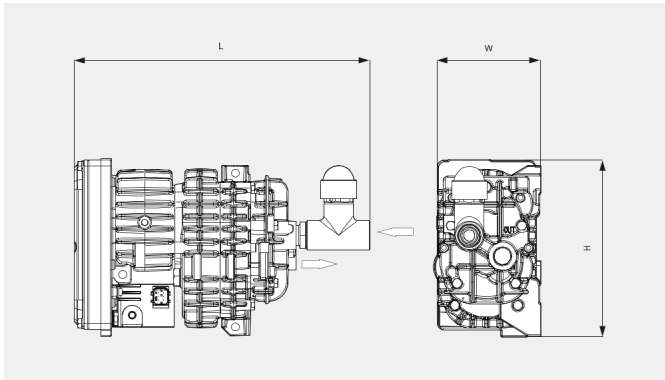

## Pumping speed

Air at 20 °C. Tolerance:  $\pm 10\%$

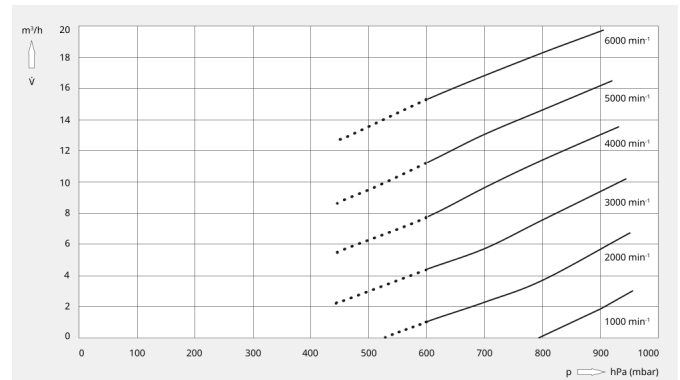

The following technical values refer to ISO 50 Hz

MINK MB 0018 A	
Nominal pumping speed	18 m³/h
Ultimate pressure	600 hPa (mbar)
Nominal motor rating	0.5 kW
Nominal motor speed	6000 min⁻¹
Ambient temperature	-40 ... +40 °C
Sound pressure level (ISO 2151), KpA = 3 dB	73 dB(A)
Weight approx.	6.5 kg
Dimensions (L x W x H)	329.5 x 120 x 199 mm
Gas inlet	G ¾"
Gas outlet	G ½"

The following technical values refer to ISO 60 Hz

MINK MB 0018 A	
Nominal pumping speed	18 m³/h
Ultimate pressure	450 hPa (mbar)
Nominal motor rating	0.5 kW
Nominal motor speed	6000 min⁻¹

# MINK MB 0018 A

Dry claw vacuum pump



MINK MB 0018 A	
Ambient temperature	-40 ... +40 °C
Sound pressure level (ISO 2151), KpA = 3 dB	73 dB(A)
Weight approx.	6.5 kg
Dimensions (L x W x H)	329.5 x 120 x 199 mm
Gas inlet	G ¾"
Gas outlet	G ½"

Do you want to know more

Please contact us!  
[busch@busch.com.my](mailto:busch@busch.com.my) or +60 (0)3 55 25 95 00



Contact form



Call us now