

Separators LSA 0100–0630

Liquid separators



Ideal protection

Two-stage separation process of contaminants for longer lifetime of the vacuum pump

High performance

Two-chamber design and automatic draining system for a high level of liquid removal, no interruption of the process gas flow

Easy servicing


Glass cylinder for easy check of the liquid level, snap closure for easy removal of lower parts for cleaning purposes

Separators LSA 0100–0630

Liquid separators



Dimensional drawing

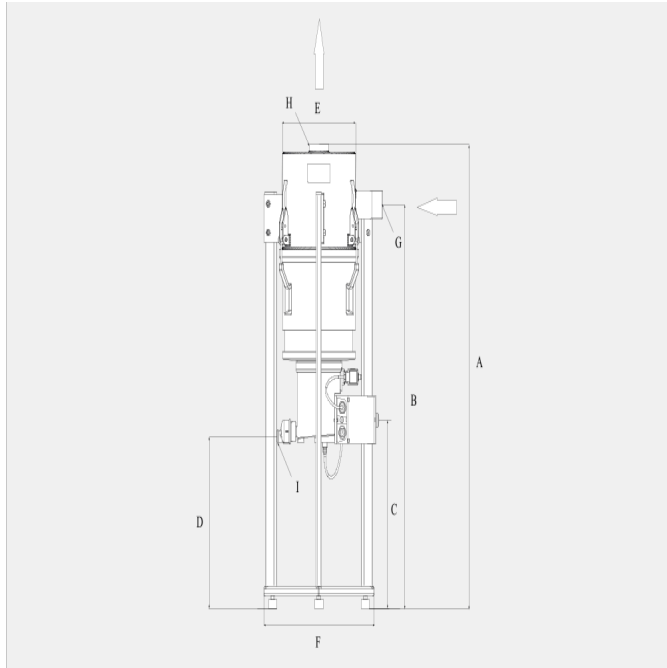

The following technical values refer to ISO Hz

	LSA 0100	LSA 0250	LSA 0630
Liquid drain capacity	1 l	1 l	1 l
Liquid surge capacity	1 l	2 l	6 l
Max. pumping speed	100 m ³ /h	250 m ³ /h	630 m ³ /h
Ambient temperature	5 ... 40 °C	5 ... 40 °C	5 ... 40 °C
Power supply	24V DC or 120V AC / 230V AC, 50 /60 Hz	24V DC or 120V AC / 230V AC, 50 /60 Hz	24V DC or 120V AC / 230V AC, 50 /60 Hz
Weight approx.	15 kg	35 kg	50 kg
Dimensions (W x H x Ø)	400 x 686 x 163 mm	410 x 970 x 290 mm	540 x 1150 x 436 mm

Do you want to know more

Please contact us!
busch@busch.com.my or +60 (0)3 55 25 95 00



Contact form



Call us now