

# COBRA NC 0600 C

Dry screw vacuum pump



Discover all advantages of the product series COBRA NC

## High performance

Advanced screw design, patented self-balancing screws

## Efficient

Low cost of ownership, minimal maintenance, long service intervals, high uptime, efficient water cooling

## ATEX-certified


Keeps gas temperatures below 200°C, certified for temperature class T3, ideally suited for processes with temperature-sensitive process gases

# COBRA NC 0600 C

Dry screw vacuum pump




## Dimensional drawing

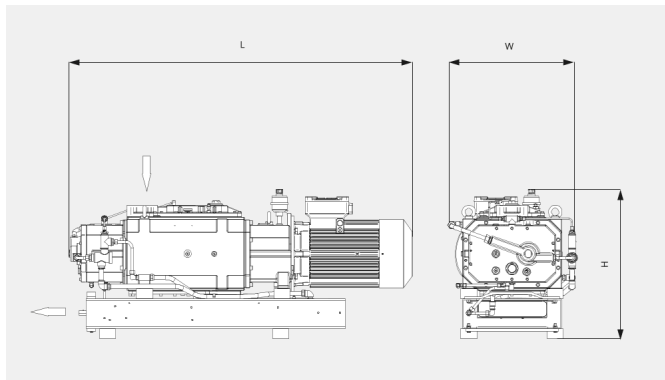

## Pumping speed

Air at 20 °C. Tolerance:  $\pm 10\%$

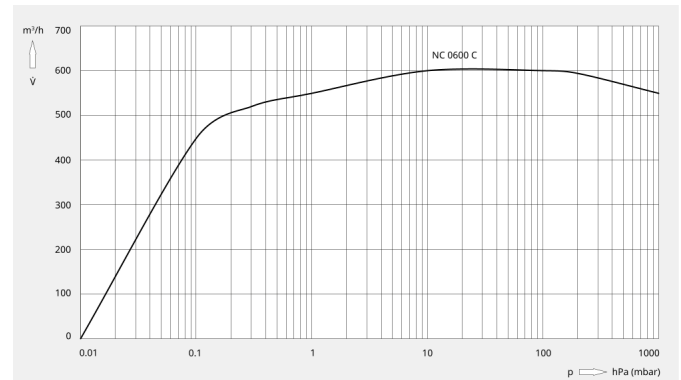

The following technical values refer to ISO 50 Hz

COBRA NC 0600 C	
Pumping speed	600 m <sup>3</sup> /h
Ultimate pressure	$\leq 0.01$ hPa (mbar)
Nominal motor rating	18.5 kW
Power consumption at ultimate pressure	9 kW
Nominal motor speed	3000 min <sup>-1</sup>
Noise level (ISO 2151)	$\leq 74$ dB(A)
Weight approx.	600 kg
Dimensions (L x W x H)	1502 x 602 x 640 mm
Gas inlet	DN 100 ISO-K
Gas outlet	DN 100 ISO-K

The following technical values refer to ISO 60 Hz

COBRA NC 0600 C	
Pumping speed	600 m <sup>3</sup> /h
Ultimate pressure	$\leq 0.01$ hPa (mbar)
Nominal motor rating	18.5 kW

# COBRA NC 0600 C

Dry screw vacuum pump



COBRA NC 0600 C	
Power consumption at ultimate pressure	9 kW
Nominal motor speed	3600 min <sup>-1</sup>
Noise level (ISO 2151)	≤ 76 dB(A)
Weight approx.	600 kg
Dimensions (L x W x H)	1502 x 602 x 640 mm
Gas inlet	DN 100 ISO-K
Gas outlet	DN 100 ISO-K

**DO YOU WANT TO KNOW MORE**

Please contact us!  
sales@busch.co.nz or +64 (0)800 428 724



CONTACT FORM



CALL US NOW