

MINK MM 1202/1252 AV

Dry claw vacuum pumps



Discover all advantages of the product series MINK MM

Efficient

Substantial energy savings compared to conventional vacuum generators, minimized operating costs

Nearly maintenance-free

Dry and contact-free operation

Robust

Proven design, more than 200.000 vacuum pumps in operation

Accessories


- Aqua version
- ATEX version
- Oxygen version
- Gas-tight version
- IoT kit

MINK MM 1202/1252 AV

Dry claw vacuum pumps




Dimensional drawing

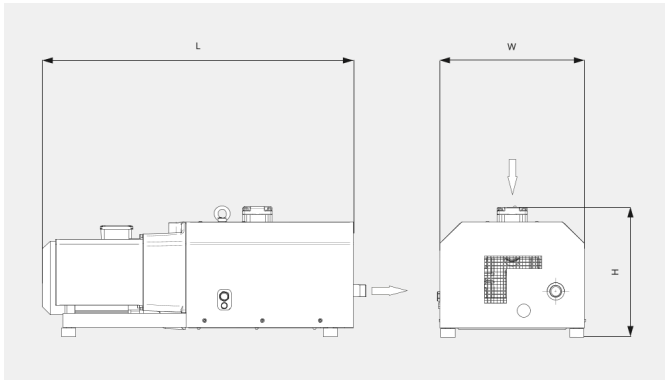

Pumping speed

Air at 20 °C. Tolerance: ± 10%

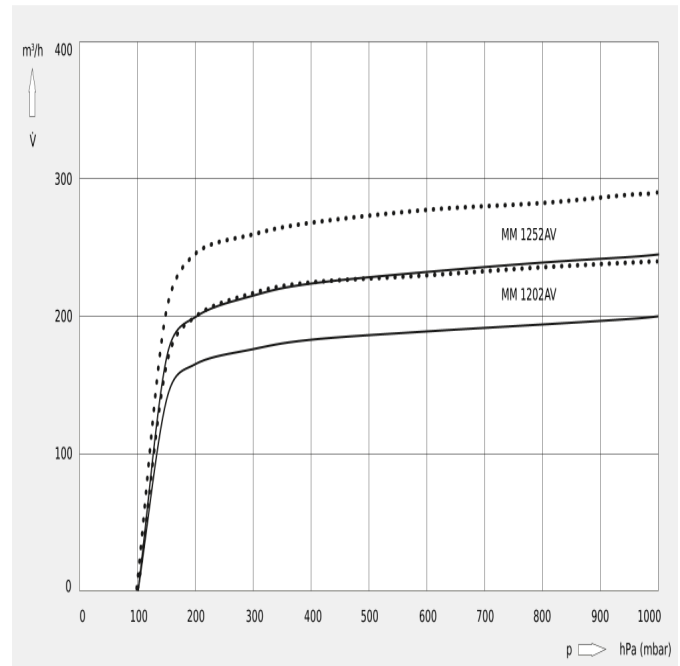

The following technical values refer to ISO 50 Hz

	MINK MM 1202 AV	MINK MM 1252 AV
Nominal pumping speed	200 m ³ /h	245 m ³ /h
Ultimate pressure	100 hPa (mbar)	100 hPa (mbar)
Ultimate pressure (continuous operation)	200 hPa (mbar)	200 hPa (mbar)
Nominal motor rating	4.3 kW	5.5 kW
Nominal motor speed	3000 min ⁻¹	3000 min ⁻¹
Noise level (ISO 2151)	75 dB(A)	75 dB(A)
Oil capacity	1 l	1 l
Weight approx.	240 kg	240 kg
Dimensions (L x W x H)	1010 x 515 x 450 mm	1050 x 515 x 450 mm
Gas inlet	G 2"	G 2"
Gas outlet	R 1"	R 1"

MINK MM 1202/1252 AV

Dry claw vacuum pumps



The following technical values refer to ISO 60 Hz

	MINK MM 1202 AV	MINK MM 1252 AV
Nominal pumping speed	240 m ³ /h	290 m ³ /h
Ultimate pressure	100 hPa (mbar)	100 hPa (mbar)
Ultimate pressure (continuous operation)	200 hPa (mbar)	200 hPa (mbar)
Nominal motor rating	5.2 kW	6.5 kW
Nominal motor speed	3600 min ⁻¹	3600 min ⁻¹
Noise level (ISO 2151)	79 dB(A)	79 dB(A)
Oil capacity	1 l	1 l
Weight approx.	245 kg	290 kg
Dimensions (L x W x H)	1090 x 515 x 450 mm	1065 x 515 x 450 mm
Gas inlet	G 2"	G 2"
Gas outlet	R 1"	R 1"

DO YOU WANT TO KNOW MORE

Please contact us!
sales@busch.co.nz or +64 (0)800 428 724



CONTACT FORM



CALL US NOW