

MINK MM 1324/1322 AV

Dry claw vacuum pumps



Discover all advantages of the product series MINK MM

Efficient

Substantial energy savings compared to conventional vacuum generators, minimized operating costs

Nearly maintenance-free

Dry and contact-free operation

Robust

Proven design, more than 200.000 vacuum pumps in operation


MINK MM 1324/1322 AV

Dry claw vacuum pumps




VACUUM SOLUTIONS

Dimensional drawing

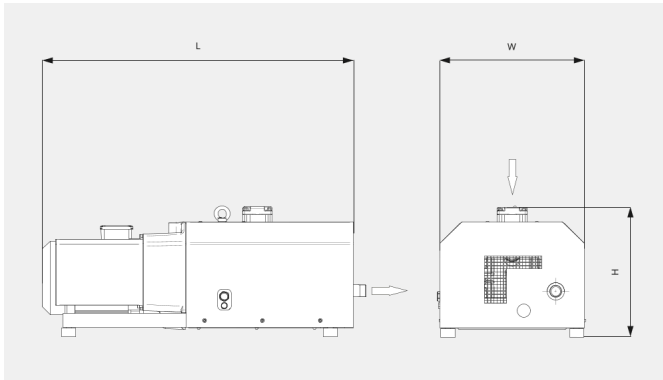

Pumping speed

Air at 20 °C. Tolerance: ± 10%

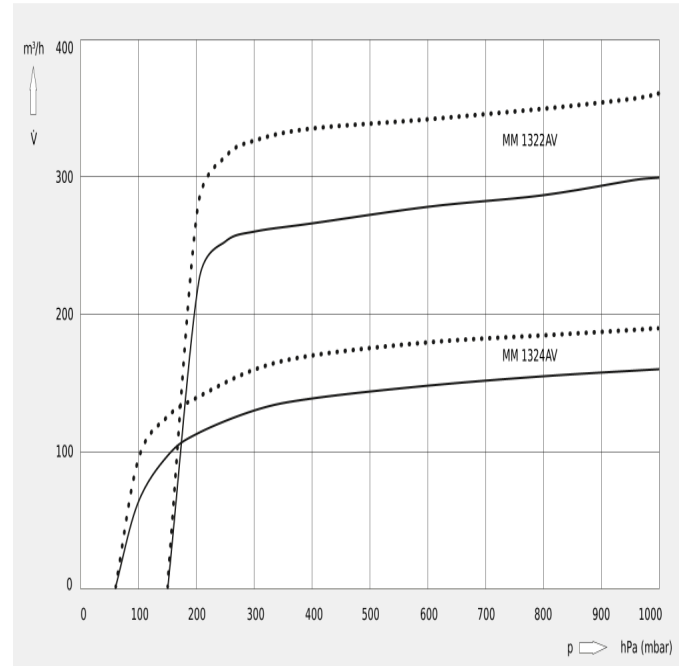

The following technical values refer to ISO 50 Hz

	MINK MM 1324 AV	MINK MM 1322 AV
Nominal pumping speed	160 m ³ /h	300 m ³ /h
Ultimate pressure	60 hPa (mbar)	150 hPa (mbar)
Ultimate pressure (continuous operation)		200 hPa (mbar)
Nominal motor rating	4.0 kW	6.0 kW
Nominal motor speed	1500 min ⁻¹	3000 min ⁻¹
Noise level (ISO 2151)	70 dB(A)	77 dB(A)
Oil capacity	1 l	1 l
Weight approx.	240 kg	260 kg
Dimensions (L x W x H)	1040 x 515 x 450 mm	1120 x 515 x 450 mm
Gas inlet	G 2"	G 2"
Gas outlet	R 1"	R 1¼"

MINK MM 1324/1322 AV

Dry claw vacuum pumps



The following technical values refer to ISO 60 Hz

	MINK MM 1324 AV	MINK MM 1322 AV
Nominal pumping speed	190 m ³ /h	360 m ³ /h
Ultimate pressure	60 hPa (mbar)	150 hPa (mbar)
Ultimate pressure (continuous operation)		200 hPa (mbar)
Nominal motor rating	4.2 kW	8.0 kW
Nominal motor speed	1800 min ⁻¹	3600 min ⁻¹
Noise level (ISO 2151)	74 dB(A)	82 dB(A)
Oil capacity	1 l	1 l
Weight approx.	270 kg	300 kg
Dimensions (L x W x H)	1100 x 515 x 450 mm	1120 x 515 x 450 mm
Gas inlet	G 2"	G 2"
Gas outlet	R 1"	R 1¼"

DO YOU WANT TO KNOW MORE

Please contact us!
sales@busch.co.nz or +64 (0)800 428 724



CONTACT FORM



CALL US NOW