

# MINK MM 1402/1502 AV

Dry claw vacuum pumps



Discover all advantages of  
the product series MINK MM

## Efficient

Substantial energy savings compared to conventional vacuum generators, minimized operating costs

## Nearly maintenance-free

Dry and contact-free operation

## Robust


Proven design, more than 200.000 vacuum pumps in operation

# MINK MM 1402/1502 AV

Dry claw vacuum pumps




## Dimensional drawing

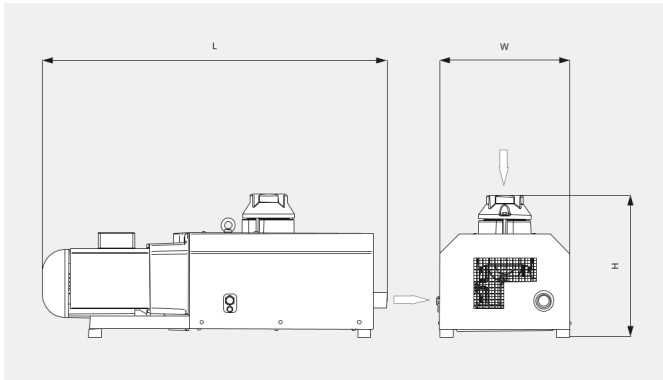

## Pumping speed

Air at 20 °C. Tolerance: ± 10%

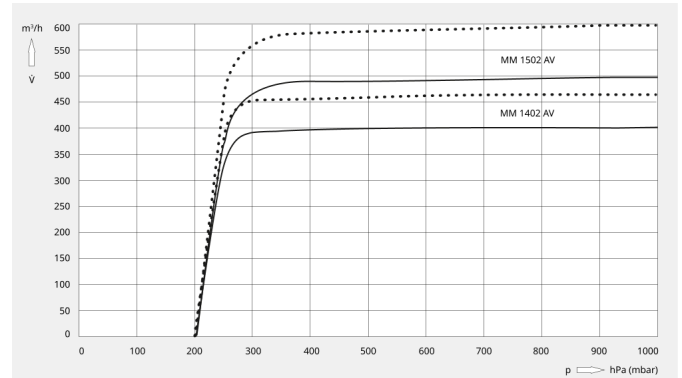

The following technical values refer to ISO 50 Hz

	MINK MM 1402 AV	MINK MM 1502 AV
Nominal pumping speed	400 m <sup>3</sup> /h	500 m <sup>3</sup> /h
Ultimate pressure	200 hPa (mbar)	200 hPa (mbar)
Nominal motor rating	7.5 kW	11.0 kW
Nominal motor speed	3000 min <sup>-1</sup>	3000 min <sup>-1</sup>
Noise level (ISO 2151)	79 dB(A)	80 dB(A)
Oil capacity	1.2 l	1.2 l
Weight approx.	290 kg	325 kg
Dimensions (L x W x H)	1310 x 515 x 545 mm	1310 x 515 x 545 mm
Gas inlet	G 3"	G 3"
Gas outlet	R 2"	R 2"

The following technical values refer to ISO 60 Hz

	MINK MM 1402 AV	MINK MM 1502 AV
Nominal pumping speed	470 m <sup>3</sup> /h	600 m <sup>3</sup> /h
Ultimate pressure	200 hPa (mbar)	200 hPa (mbar)
Nominal motor rating	9.5 kW	12.6 kW
Nominal motor speed	3600 min <sup>-1</sup>	3600 min <sup>-1</sup>

# MINK MM 1402/1502 AV

Dry claw vacuum pumps



	MINK MM 1402 AV	MINK MM 1502 AV
Noise level (ISO 2151)	83 dB(A)	86 dB(A)
Oil capacity	1.2 l	1.2 l
Weight approx.	320 kg	325 kg
Dimensions (L x W x H)	1310 x 515 x 545 mm	1310 x 515 x 545 mm
Gas inlet	G 3"	G 3"
Gas outlet	R 2"	R 2"

**DO YOU WANT TO KNOW MORE**

Please contact us!  
sales@busch.co.nz or +64 (0)800 428 724



CONTACT FORM



CALL US NOW