

MINK MV 0502/0602 B

Dry claw vacuum pumps



Discover all advantages of the product series MINK MV

Quiet

Low noise level due to a state-of-the-art acoustic design, can be installed at workstations

Efficient

Latest claw vacuum technology, low energy consumption, minimized operating costs, nearly maintenance-free, effective air cooling

Compact


Small footprint

MINK MV 0502/0602 B

Dry claw vacuum pumps




Dimensional drawing

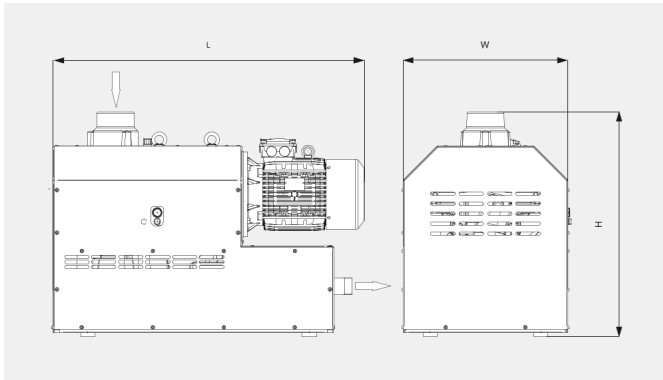

Pumping speed

Air at 20 °C. Tolerance: ± 10%

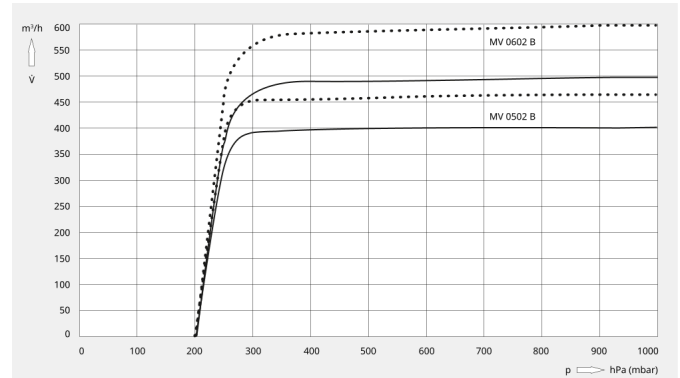

The following technical values refer to ISO 50 Hz

	MINK MV 0502 B	MINK MV 0602 B
Nominal pumping speed	400 m³/h	500 m³/h
Ultimate pressure	200 hPa (mbar)	200 hPa (mbar)
Nominal motor rating	7.5 kW	11.0 kW
Nominal motor speed	3000 min ⁻¹	3000 min ⁻¹
Noise level (ISO 2151)	72 dB(A)	73 dB(A)
Oil capacity	1.2 l	1.2 l
Weight approx.	450 kg	468 kg
Dimensions (L x W x H)	1085 x 580 x 795 mm	1100 x 580 x 795 mm
Gas inlet	G 3"	G 3"
Gas outlet	R 2"	R 2"

The following technical values refer to ISO 60 Hz

	MINK MV 0502 B	MINK MV 0602 B
Nominal pumping speed	470 m³/h	600 m³/h
Ultimate pressure	200 hPa (mbar)	200 hPa (mbar)
Nominal motor rating	9.5 kW	12.6 kW
Nominal motor speed	3600 min ⁻¹	3600 min ⁻¹

MINK MV 0502/0602 B

Dry claw vacuum pumps



	MINK MV 0502 B	MINK MV 0602 B
Noise level (ISO 2151)	76 dB(A)	77 dB(A)
Oil capacity	1.2 l	1.2 l
Weight approx.	470 kg	472 kg
Dimensions (L x W x H)	1085 x 580 x 795 mm	1100 x 580 x 795 mm
Gas inlet	G 3"	G 3"
Gas outlet	R 2"	R 2"

DO YOU WANT TO KNOW MORE

Please contact us!
sales@busch.co.nz or +64 (0)800 428 724



CONTACT FORM



CALL US NOW