

R5 PB 0003 D

Oil-lubricated rotary vane vacuum pump



Discover all advantages of the product series R5 PB

Compact

Block construction, reduced height and weight, specially designed for small vacuum packaging machines or for sous-vide cooking, marinating or preserving foodstuffs, prefilled with special oil, no oil change necessary during whole life cycle

Reliable

Robust construction, highly durable vanes, proven rotary vane technology, long service life, thermo protecting element

Quiet


Low noise level, ideal for use in deli counters or restaurants

R5 PB 0003 D

Oil-lubricated rotary vane vacuum pump




Dimensional drawing

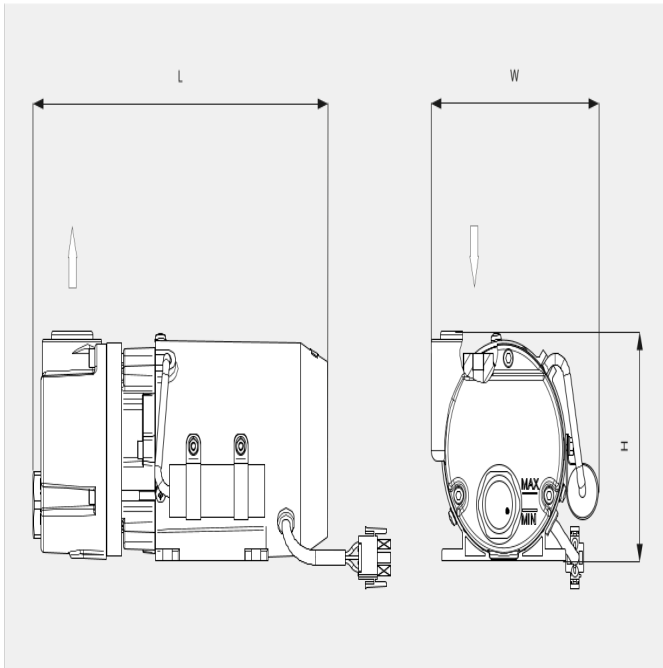

Pumping speed

Air at 20 °C. Tolerance: $\pm 10\%$

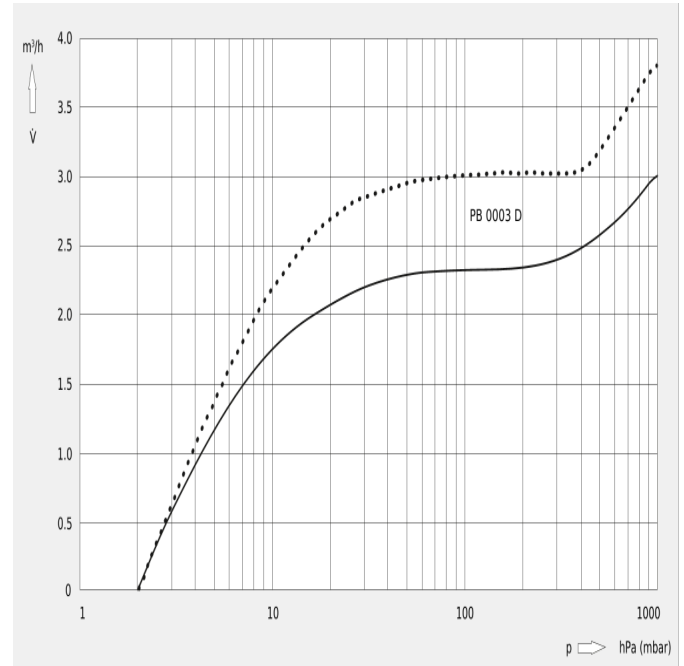

The following technical values refer to ISO 50 Hz

R5 PB 0003 D	
Nominal pumping speed	3 m³/h
Ultimate pressure	2.0 hPa (mbar)
Nominal motor rating	0.1 kW
Nominal motor speed	3000 min ⁻¹
Noise level (ISO 2151)	59 dB(A)
Oil capacity	0.05 l
Weight approx.	5.2 kg
Dimensions (L x W x H)	250 x 141 x 110 mm
Gas outlet	–
Gas inlet	G #"

R5 PB 0003 D

Oil-lubricated rotary vane vacuum pump



The following technical values refer to ISO 60 Hz

R5 PB 0003 D	
Nominal pumping speed	3.8 m ³ /h
Ultimate pressure	2.0 hPa (mbar)
Nominal motor rating	0.12 kW
Nominal motor speed	3600 min ⁻¹
Noise level (ISO 2151)	66 dB(A)
Oil capacity	0.05 l
Weight approx.	5.2 kg
Dimensions (L x W x H)	250 x 141 x 110 mm
Gas outlet	–
Gas inlet	G #"

DO YOU WANT TO KNOW MORE

Please contact us!
sales@busch.co.nz or +64 (0)800 428 724



CONTACT FORM



CALL US NOW