

COBRA BC 0101 G

Dry Screw Vacuum Pump



VACUUM SOLUTIONS



DISCOVER ALL ADVANTAGES
OF THE COBRA BC SERIES

High performance

Advanced screw design, bell-shaped construction, patented self-balancing screws, excellent running qualities, perfectly suited for tasks in load lock and transfer chambers, metrology, lithography, physical vapor deposition and rapid thermal annealing

Efficient

Intelligent variable speed drive, low cost of ownership, minimal maintenance, high uptime, direct water cooling

Compact


Fit-in-place design, directly mounted canned motor, integrated control panel

COBRA BC 0101 G

Dry Screw Vacuum Pump




Dimensional drawing

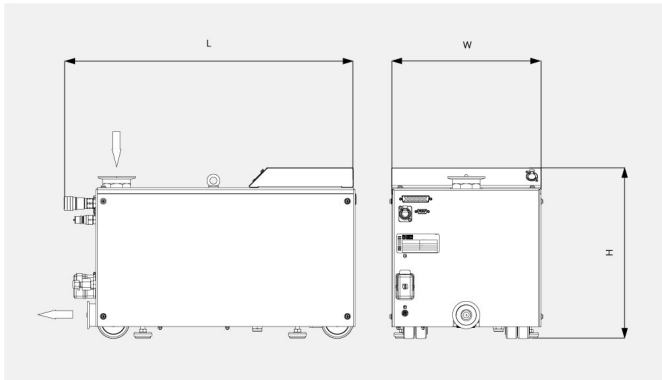

Pumping speed

Air at 20 °C. Tolerance: $\pm 10\%$

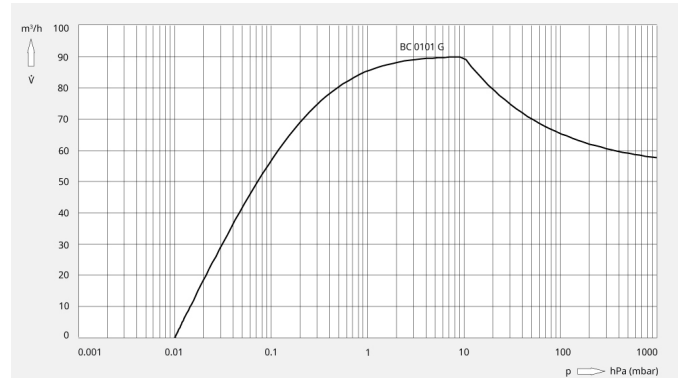

Technical data

BC 0101 G	
Nominal pumping speed	90 m³/h
Ultimate pressure	0.01 hPa (mbar)
Nominal motor rating	1.5 kW
Nominal motor speed	3000 min ⁻¹
Power consumption at ultimate pressure	0.7 kW
Noise level (ISO 2151)	58 dB(A)
Water consumption	1.0 l/min
Weight approx.	110 kg
Dimensions (L x W x H)	520 x 300 x 340 mm
Gas inlet / outlet	DN 50 KF / DN 40 KF

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
sales@busch.ie or +353 (0)1 832 13 30



CONTACT FORM



CALL NOW