

# COBRA DH 2760-6260 A

Dry screw vacuum pumps



**VACUUM SOLUTIONS**

Part of the **BUSCH** GROUP



## Plug&Pump

Ready for immediate use, intuitive 7" color touch screen control panel, remote control via web server possible

## High performance

High pumping speed enables fast pump down times, e.g. in load lock applications

## Efficient

Completely gas-tight and dry system with less wear parts, longer service intervals and high energy efficiency, 70% less power consumption at ultimate pressure by using VacBoost energy saving module

# COBRA DH 2760–6260 A


Dry screw vacuum pumps



VACUUM SOLUTIONS


Part of the **BUSCH** GROUP

Dimensional drawing

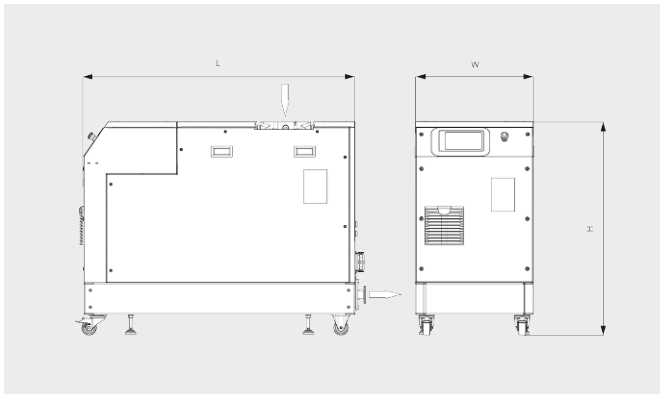

Pumping speed

Air at 20°C. Tolerance: ± 10%

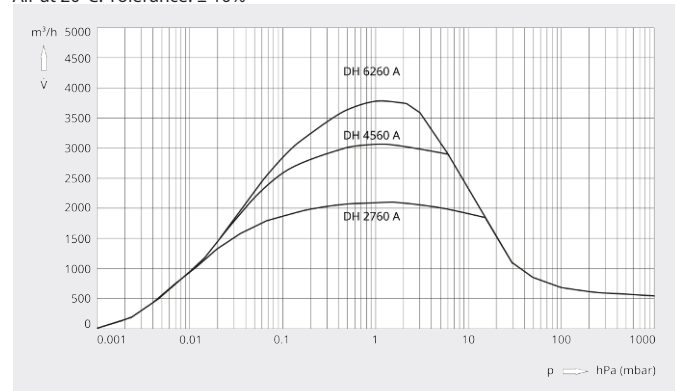

|                                                                  | COBRA DH 2760 A                          | COBRA DH 4560 A                          | COBRA DH 6260 A                          |
|------------------------------------------------------------------|------------------------------------------|------------------------------------------|------------------------------------------|
| Nominal pumping speed                                            | 2700 m³/h                                | 4500 m³/h                                | 6200 m³/h                                |
| Pumping speed at 1 hPa(mbar)                                     | 2112 m³/h                                | 3077 m³/h                                | 3781 m³/h                                |
| Ultimate pressure                                                | 0.001 hPa (mbar)                         | 0.001 hPa (mbar)                         | 0.001 hPa (mbar)                         |
| Nominal motor rating                                             | 22.5 kW                                  | 22.5 kW                                  | 22.5 kW                                  |
| Power consumption at ultimate pressure                           | 9.3 kW                                   | 9.5 kW                                   | 9.7 kW                                   |
| Power consumption at ultimate pressure with energy saving module | 2.7* kW                                  | 2.7* kW                                  | 2.7* kW                                  |
| Leakage rate                                                     | 1 · 10 <sup>-6</sup> Pa m³/s             | 1 · 10 <sup>-6</sup> Pa m³/s             | 1 · 10 <sup>-6</sup> Pa m³/s             |
| Water consumption                                                | 10 l/min                                 | 10 l/min                                 | 10 l/min                                 |
| Sound pressure level (ISO 2151), KpA = 3 dB                      | 69 dB(A)                                 | 69 dB(A)                                 | 69 dB(A)                                 |
| Protection class                                                 | IP54                                     | IP54                                     | IP54                                     |
| Weight approx.                                                   | 950 kg                                   | 950 kg                                   | 950 kg                                   |
| Dimensions (L x W x H)                                           | 1446 x 630 x 1140 mm                     | 1446 x 630 x 1140 mm                     | 1446 x 630 x 1140 mm                     |
| Gas inlet / outlet                                               | DN 160 ISO-F   DN 150 PN16 / DN 63 ISO-F | DN 160 ISO-F   DN 150 PN16 / DN 63 ISO-F | DN 160 ISO-F   DN 150 PN16 / DN 63 ISO-F |

\*Rotational speed in stand-by

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

[sales@busch.com.sg](mailto:sales@busch.com.sg) or +65 (0)64 88 08 66



CONTACT FORM



CALL NOW