

# MINK MV 0502/0602 B

Dry claw vacuum pumps



VACUUM SOLUTIONS



## Quiet

Low noise level due to a state-of-the-art acoustic design, can be installed at workstations

## Efficient

Latest claw vacuum technology, low energy consumption, minimized operating costs, nearly maintenance-free, effective air cooling

## Compact

Small footprint


# MINK MV 0502/0602 B

Dry claw vacuum pumps



VACUUM SOLUTIONS


Dimensional drawing

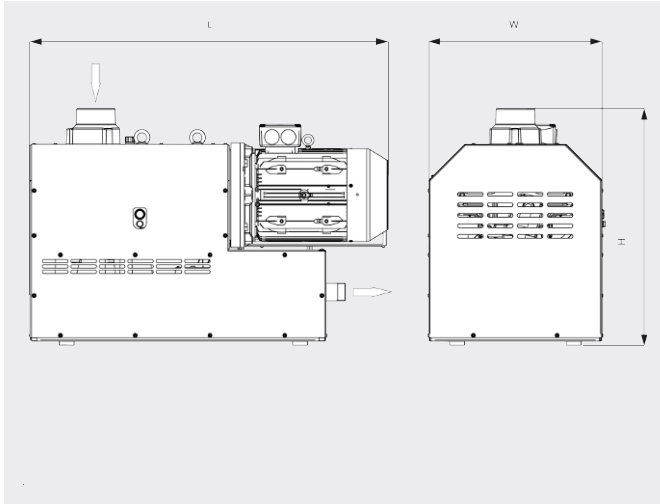

Pumping speed

Air at 20°C. Tolerance: ± 10%

— 50 Hz ..... 60 Hz

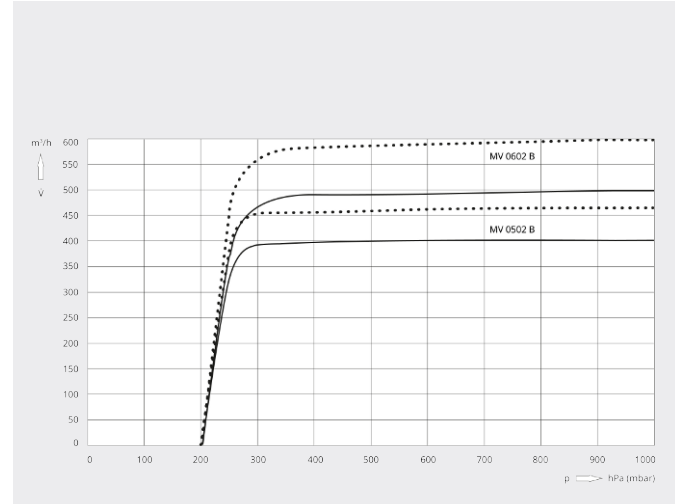

	MINK MV 0502 B	MINK MV 0602 B
<b>Nominal pumping speed</b>	400 / 470 m³/h (50 / 60 Hz)	500 / 600 m³/h (50 / 60 Hz)
<b>Ultimate pressure</b>	200 hPa (mbar) (50 / 60 Hz)	200 hPa (mbar) (50 / 60 Hz)
<b>Nominal motor rating</b>	7.5 kW (50 Hz) 7.5 / 9.5 kW (50 / 60 Hz)	9.2 kW (50 Hz) 11.0 / 12.6 kW (50 / 60 Hz)
<b>Nominal motor speed</b>	3000 / 3600 min <sup>-1</sup> (50 / 60 Hz)	3000 / 3600 min <sup>-1</sup> (50 / 60 Hz)
<b>Noise level (ISO 2151)</b>	72 / 75 dB(A) (50 / 60 Hz)	73 / 76 dB(A) (50 / 60 Hz)
<b>Weight approx.</b>	450 / 470 kg (50 / 60 Hz)	468 / 472 kg (50 / 60 Hz)
<b>Dimensions (L x W x H)</b>	1085 x 580 x 795 mm	1100 x 580 x 795 mm
<b>Gas inlet / outlet</b>	G 3" / R 2"	G 3" / R 2"

## DO YOU WANT TO KNOW MORE?

Get in touch with us directly!  
[sales@busch.com.sg](mailto:sales@busch.com.sg) or +65 (0)64 88 08 66



CONTACT FORM



CALL NOW