

MINK MM 1202/1252 AV

Dry claw vacuum pumps



VACUUM SOLUTIONS



Efficient

Substantial energy savings compared to conventional vacuum generators, minimized operating costs

Nearly maintenance-free

Dry and contact-free operation

Robust

Proven design, more than 200.000 vacuum pumps in operation


MINK MM 1202/1252 AV

Dry claw vacuum pumps



VACUUM SOLUTIONS


Dimensional drawing

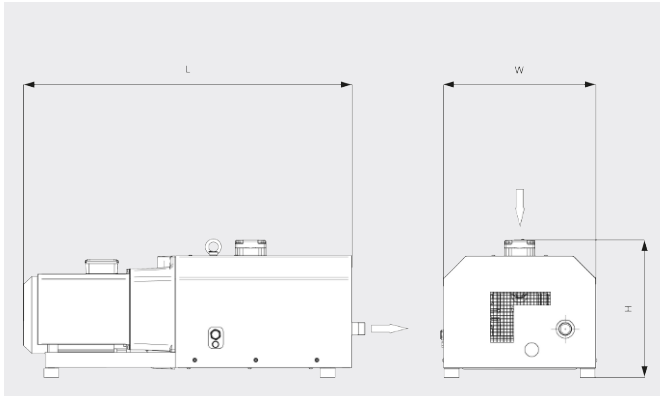

Pumping speed

Air at 20°C. Tolerance: ± 10%

— 50 Hz 60 Hz

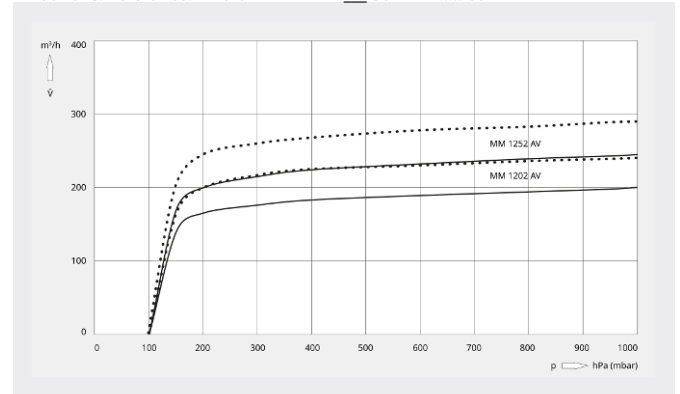

	MINK MM 1202 AV	MINK MM 1252 AV
Nominal pumping speed	200 / 240 m³/h (50 / 60 Hz)	245 / 290 m³/h (50 / 60 Hz)
Ultimate pressure	100 hPa (mbar) (50 / 60 Hz)	100 hPa (mbar) (50 / 60 Hz)
Ultimate pressure (continuous operation)	200 hPa (mbar) (50 / 60 Hz)	200 hPa (mbar) (50 / 60 Hz)
Nominal motor rating	4.3 / 5.2 kW (50 / 60 Hz)	5.1 / 6.8 kW (50 / 60 Hz)
Nominal motor speed	3000 / 3600 min ⁻¹ (50 / 60 Hz)	3000 / 3600 min ⁻¹ (50 / 60 Hz)
Noise level (ISO 2151)	75 / 79 dB(A) (50 / 60 Hz)	75 / 79 dB(A) (50 / 60 Hz)
Weight approx.	240 / 245 kg (50 / 60 Hz)	240 / 290 kg (50 / 60 Hz)
Dimensions (L x W x H)	1010 x 515 x 450 / 1090 x 515 x 450 mm (50 / 60 Hz)	1050 x 515 x 450 / 1065 x 515 x 450 mm (50 / 60 Hz)
Gas inlet / outlet	G 2" / R 1"	G 2" / R 1"

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
sales@busch.com.sg or +65 (0)64 88 08 66



CONTACT FORM



CALL NOW