

COBRA DX 0650/0950 A PLUS

Dry screw vacuum pumps



VACUUM SOLUTIONS



Version in illustration with cabinet, standard version comes without cabinet

Plug&Pump

Easy handling, control panel with touch screen and intuitive user interface, perfectly suited for many industries and applications, including solar power industry, lithium battery production, drying, food packaging, coating, vacuum furnaces and central vacuum systems

Cost savings

Reduced energy consumption and minimized operating costs, variable speed drive

Proven technology

Reliable operation thanks to proven dry screw vacuum technology, advanced screw design, minimal maintenance, small footprint

Accessories, spare parts and options

- Air-cooled version available


COBRA DX 0650/0950 A PLUS

Dry screw vacuum pumps




VACUUM SOLUTIONS

Dimensional drawing

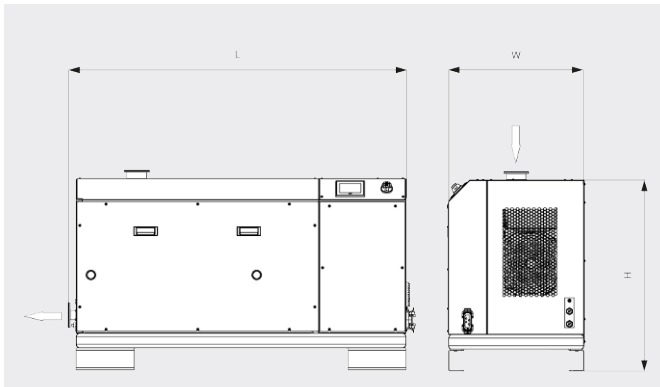

Pumping speed

Air at 20°C. Tolerance: $\pm 10\%$

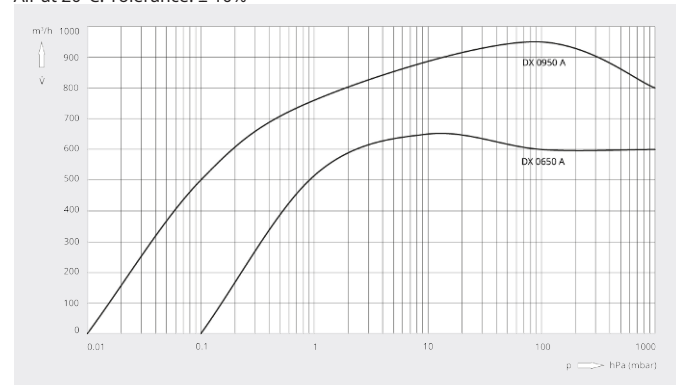

| | COBRA DX 0650 A PLUS | COBRA DX 0950 A PLUS |
|--|--------------------------------|-------------------------|
| Nominal pumping speed | max. 650 m³/h | max. 950 m³/h |
| Ultimate pressure | ≤ 0.1 hPa (mbar) | ≤ 0.01 hPa (mbar) |
| Nominal motor rating | 15 kW | 18.5 kW |
| Nominal motor speed | 3000 min ⁻¹ (50 Hz) | 4320 min ⁻¹ |
| Noise level (ISO 2151 at 50 Hz – Standard) | ≤ 67 dB(A) | ≤ 75 dB(A) |
| Weight approx. | 1125 kg | 1125 kg |
| Dimensions (L x W x H) | 1700 x 700 x 1000 mm | 1700 x 700 x 1000 mm |
| Gas inlet / outlet | DN 100 ISO / DN 100 ISO | DN 100 ISO / DN 100 ISO |

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
ersin.kilic@busch.com.tr or +90 216 912 46 04



CONTACT FORM



CALL NOW