

TYR WT 0100-0730 CP

Rotary lobe blowers



VACUUM SOLUTIONS



Efficient

Effective compression and gas transport, flow-optimized blower stages, low energy consumption, minimized operating costs, minimal maintenance

Quiet

Innovative noise reduction concept, integrated inlet and outlet silencers

Robust

Durable construction, contact-free operating principle, base frame with forklift slots for easy handling

Accessories, spare parts and options

- Non-return valve
- Rubber and stainless steel expansion joints
- Electronic filter monitoring
- Temperature monitoring device
- Oil temperature sensors
- Nickel coating of stage
- V-belt guard for versions with acoustic enclosure
- Oil filler unit
- Resonance pulsation silencer
- Water cooling system (water-air or water-water)
- External control cabinet
- Acoustic enclosure (optionally with all-weather finish for outdoor applications)
- Reactive inlet and outlet silencers
- Door switch
- C4 corrosion protection version
- Labyrinth seal in stainless steel


TYR WT 0100-0730 CP

Rotary lobe blowers




VACUUM SOLUTIONS

Dimensional drawing
(with acoustic enclosure)

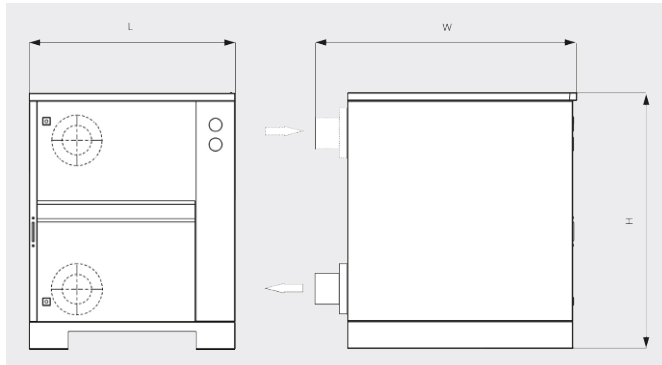

Dimensional drawing
(without acoustic enclosure)

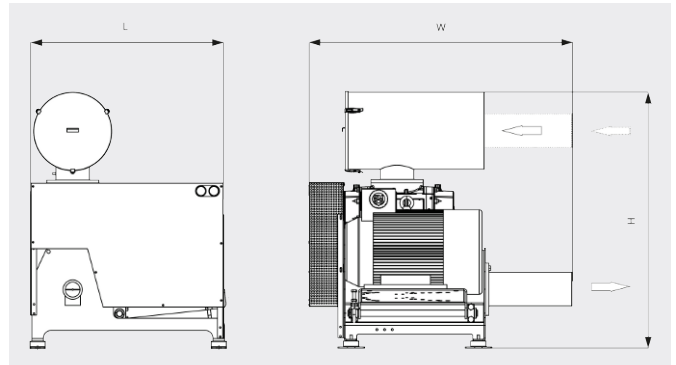

	TYR WT 0100 CP	TYR WT 0150 CP	TYR WT 0280 CP
Volume flow	152 – 535 m ³ /h	480 – 808 m ³ /h	698 – 1355 m ³ /h
Max. differential pressure	+1000 mbar	+1000 mbar	+1000 mbar
Nominal motor rating	18.5 kW	30.0 kW	45.0 kW
Blower speed	4700 min ⁻¹	4700 min ⁻¹	4100 min ⁻¹
Weight approx. (without/with acoustic enclosure)	180 / 295 kg	197 / 312 kg	346 / 535 kg
Dimensions (L x W x H) (without/with acoustic enclosure)	690 x 1080 x 1028 / 800 x 1157 x 1082 mm	690 x 1080 x 1028 / 800 x 1157 x 1082 mm	945 x 1218 x 1251 / 1050 x 1269 x 1302 mm
Gas inlet / outlet	Ø 114 mm	Ø 114 mm	Ø 159 mm

	TYR WT 0390 CP	TYR WT 0600 CP	TYR WT 0730 CP
Volume flow	1258 – 1793 m ³ /h	1791 – 2973 m ³ /h	2650 – 3972 m ³ /h
Max. differential pressure	+1000 mbar	+1000 mbar	+1000 mbar
Nominal motor rating	55.0 kW	90.0 kW	90.0 kW
Blower speed	4100 min ⁻¹	3500 min ⁻¹	3500 min ⁻¹
Weight approx. (without/with acoustic enclosure)	372 / 561 kg	711 / 1014 kg	750 / 1053 kg
Dimensions (L x W x H) (without/with acoustic enclosure)	945 x 1218 x 1251 / 1050 x 1269 x 1302 mm	1250 x 1705 x 1660 / 1450 x 1760 x 1732 mm	1250 x 1705 x 1660 / 1450 x 1760 x 1732 mm
Gas inlet / outlet	Ø 159 mm	Ø 219 mm	Ø 219 mm

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
info@busch.com.tr or +90 216 912 46 04



CONTACT FORM



CALL NOW