

COBRA BC 0100/0200 F

Dry screw vacuum pumps



VACUUM SOLUTIONS



High performance

Advanced screw design, bell-shaped construction, patented self-balancing screws, excellent running qualities, perfectly suited for tasks in load lock and transfer chambers, metrology, lithography, physical vapor deposition and rapid thermal annealing

Efficient

Low cost of ownership, minimal maintenance, long service intervals, high uptime, direct water cooling, idle mode capabilities

Compact

Fit-in-place design, directly mounted canned motor


COBRA BC 0100/0200 F

Dry screw vacuum pumps




VACUUM SOLUTIONS

Dimensional drawing

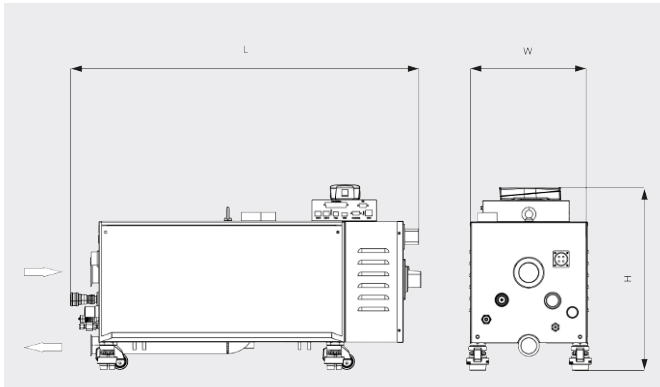

Pumping speed

Air at 20°C. Tolerance: ± 10%

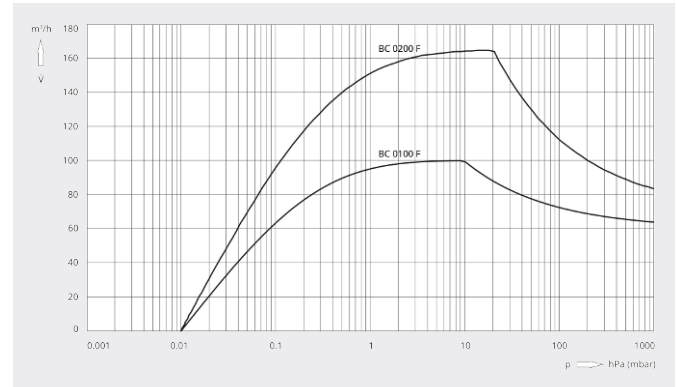

	COBRA BC 0100 F	COBRA BC 0200 F
Nominal pumping speed	100 m ³ /h	165 m ³ /h
Ultimate pressure	0.01 hPa (mbar)	0.01 hPa (mbar)
Nominal motor rating	1.5 kW	2.9 kW
Power consumption at ultimate pressure / idle mode	1.3 kW	1.6 kW
Nominal motor speed	3600 min ⁻¹	4570 min ⁻¹
Noise level (ISO 2151)	58 dB(A)	60 dB(A)
Water consumption	min. 1.0 l/min	min. 2.0 l/min
Nitrogen consumption	0 - 50 l/min	0 - 50 l/min
Weight approx.	120 kg	130 kg
Dimensions (L x W x H)	829 x 304 x 362 mm	806 x 304 x 392 mm
Gas inlet / outlet	DN 50 KF / DN 40 KF	DN 50 KF / DN 40 KF

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!
sales@busch.co.uk or +44 (0)1952 67 74 32



CONTACT FORM



CALL NOW