

COBRA DX 0650/0950 A PLUS

Dry screw vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP



Version in illustration with cabinet, standard version comes without cabinet

Plug&Pump

Easy handling, control panel with touch screen and intuitive user interface, perfectly suited for many industries and applications, including solar power industry, lithium battery production, drying, food packaging, coating, vacuum furnaces and central vacuum systems

Cost savings

Reduced energy consumption and minimized operating costs, variable speed drive

Proven technology

Reliable operation thanks to proven dry screw vacuum technology, advanced screw design, minimal maintenance, small footprint

Accessories, spare parts and options

- Air-cooled version available

COBRA DX 0650/0950 A PLUS


Dry screw vacuum pumps



VACUUM SOLUTIONS

Part of the **BUSCH** GROUP

Dimensional drawing

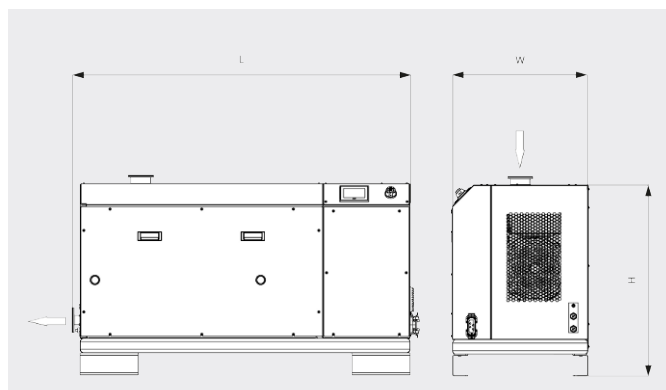

Pumping speed

Air at 20°C. Tolerance: $\pm 10\%$



	COBRA DX 0650 A PLUS	COBRA DX 0950 A PLUS
Nominal pumping speed	max. 650 m³/h	max. 950 m³/h
Ultimate pressure	≤ 0.1 hPa (mbar)	≤ 0.01 hPa (mbar)
Nominal motor rating	15 kW	18.5 kW
Nominal motor speed	3000 min ⁻¹ (50 Hz)	4320 min ⁻¹
Sound pressure level (ISO 2151), KpA = 3 dB	≤ 67 dB(A)	≤ 75 dB(A)
Weight approx.	1125 kg	1125 kg
Dimensions (L x W x H)	1700 x 700 x 1000 mm	1700 x 700 x 1000 mm
Gas inlet / outlet	DN 100 ISO / DN 100 ISO	DN 100 ISO / DN 100 ISO

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!

sales@busch.co.uk or +44 (0)1952 67 74 32



CONTACT FORM



CALL NOW